

Enclosure air conditioner



Description


Order Number:	850610S62
Brand Name:	SLIMLINE PRO
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus

Technical data

Cooling capacity 95F/95F:	2285 BTU/hr @ 50 Hz 2320 BTU/hr @ 60 Hz
Cooling capacity 95F/122F:	1740 BTU/hr @ 50 Hz 1825 BTU/hr @ 60 Hz
EER 95F95F:	1.55
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	125 g / 4.4 oz
High / low pressure:	28 / 6 bar 406 / 88 psi
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 117 / 240 cfm Enclosure circuit: 72 / 106 cfm
Mounting:	Wall mounted / recessed
Dimension H x W x D:	23.7 x 9.9 x 5.4 inch
Weight:	31 lbs.
Voltage / Frequency:	120 V ~ 50/60 Hz
UL Voltage / Frequency:	120 V ~ 60 Hz
Current 95F95F:	5.6 A @ 50 Hz 4.1 A @ 60 Hz
Starting current:	13 A
Max. current:	6.0 A
Nominal power 95F95F:	515 W @ 50 Hz 455 W @ 60 Hz
Max. power:	620 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	3.7 A

Full load current fans:	0.4 A
Connection:	4 pole terminal block for power 5 pole terminal block for signals 3 pole terminal block for RS 485

Cut out dimensions:

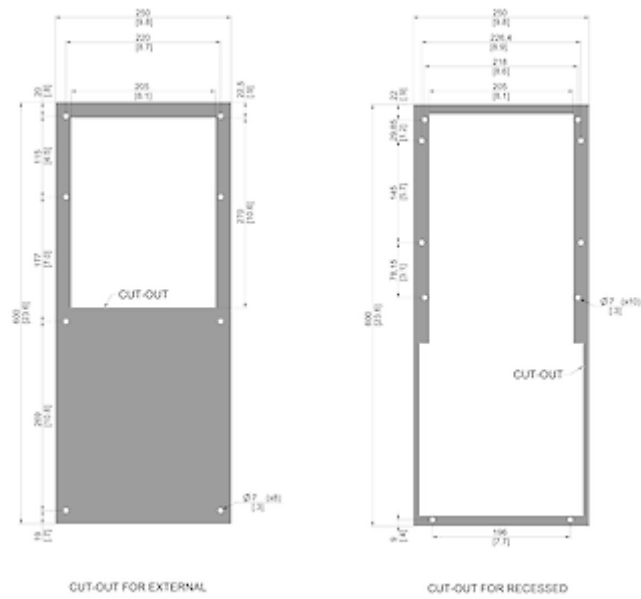

Order Information

Box dimensions	692 x 285 x 192 mm
-----------------------	--------------------

Gross weight	16 Kg
---------------------	-------

Taric code	84158200
-------------------	----------