

Enclosure air conditioner



Description


Order Number:	841220S62
Brand Name:	SLIMLINE PRO
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Note:	Hat denselben Schaltschrankausbruch wie KG 8508 und KG 8512
Approvals:	CE, cURus, cULus

Technical data

Cooling capacity 95F/95F:	5120 BTU @ 50 Hz 5630 BTU @ 60 Hz
Cooling capacity 95F/122F:	4440 BTU @ 50 Hz 4950 BTU @ 60 Hz
EER 95F95F:	2.20
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	247 g / 8.7 oz.
High / low pressure:	30 / 6 bar 435 / 88 psi
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 140°F
Air volume flow (system / unimpeded):	Ambient: 323 / 500 m³/h Enclosure: 206 / 500 m³/h
Mounting:	Wall mounted / recessed
Dimension H x W x D:	37.5 x 15.6 x 9.9 inch
Weight:	88 lbs
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V / 60Hz 3~
Current 95F95F:	1.7 A @ 50 Hz 1.7 A @ 60 Hz
Starting current:	8.2 A
Max. current:	2.0 A
Nominal power 95F95F:	710 W @ 50 Hz 925 W @ 60 Hz
Max. power:	1.18 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA

Rated current compressor:	1.3 A
Full load current fans:	1.3 A
Connection:	4 - poliger Stecker für Versorgungsspannung 5 - poliger Stecker für Signale 3 - poliger Stecker für RS 485

Cut out dimensions:

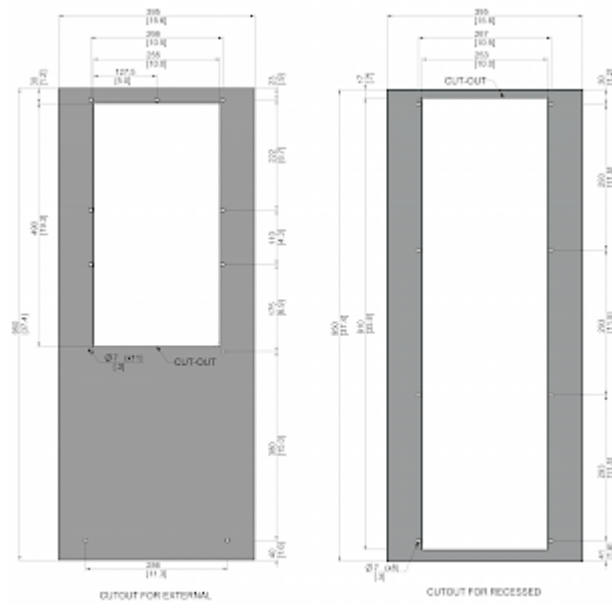

Order Information

Box dimensions	1042 x 495 x 283 mm
-----------------------	---------------------

Gross weight	46 Kg
---------------------	-------

Taric code	84158200
-------------------	----------