

Enclosure air conditioner




Description

Order Number:	850510S62
Brand Name:	SLIMLINE PRO
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	2215 BTU
Cooling capacity 95F/122F:	1350 BTU
EER 95F95F:	1.41
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	103 g / 3.63 oz
High / low pressure:	25 / 6 bar 363 / 87 psi
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 117 / 240 cfm Enclosure circuit: 72 / 106 cfm
Mounting:	Wall mounted / recessed
Dimension H x W x D:	14.6 x 20.5 x 6.2 inch
Weight:	35 lbs
Voltage / Frequency:	120 V ~ 60 Hz
UL Voltage / Frequency:	120 V ~ 60 Hz
Current 95F95F:	4.1 A
Starting current:	13 A
Max. current:	5.3 A
Nominal power 95F95F:	460 W
Max. power:	610 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	3.7 A
Full load current fans:	0.4 A
Connection:	4 pole terminal block for electrical connection 5 pole terminal block for signals 3 pole terminal block for RS 485

Performance graph:

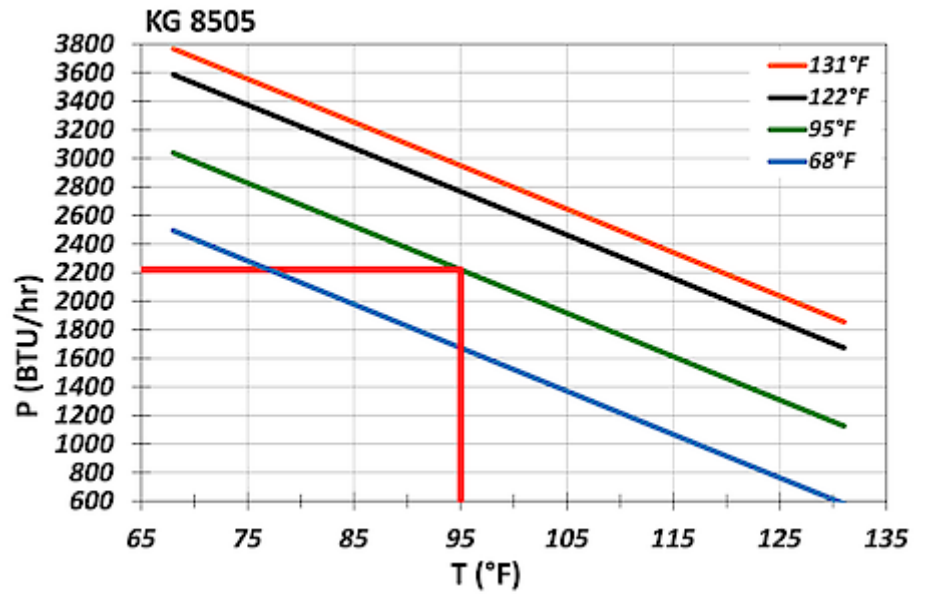

Cut out dimensions:

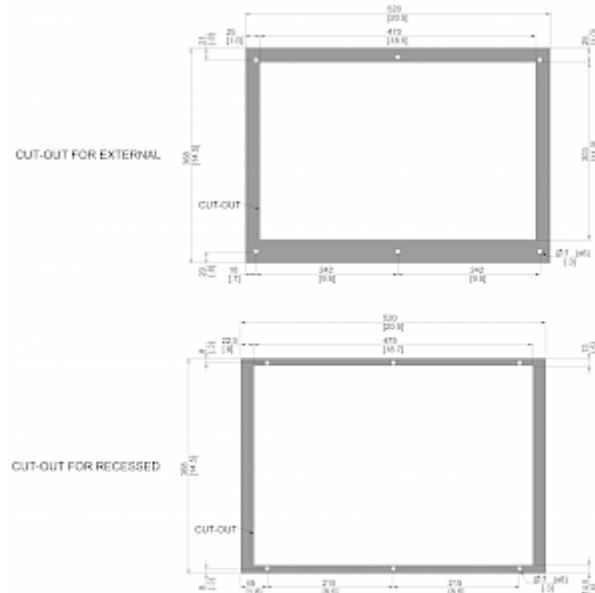

Order Information

Box dimensions	460 x 620 x 181.75 mm
-----------------------	-----------------------

Gross weight	20 Kg
---------------------	-------

Taric code	84158200
-------------------	----------