

Filterless enclosure cooling unit



Description

Order Number:	0901513811
Brand Name:	SLIMLINE
Housing Material:	Mild steel, RAL 9018
IP protection class to EN 60 529:	IP 54 / TYPE 12
Approvals:	CE, cURus, cULus

Technical Data


Cooling capacity L35L35 (EN14511-3):	520 W
Cooling capacity L35L50 (EN14511-3):	180 W
EER L35L35:	1.1
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	130 g / 5 oz
High / low Pressure:	17 / 15 bar 250 / 220 psig
Air flow volume (system / unimpeded):	Ambient air circuit: 250 / 650 m³/h Cabinet air circuit: 125 / 250 m³/h
Operating Temperature Range:	10°C - 50°C
Mounting:	External
Dimensions A x B x C (D+E):	600 x 320 x 110 (25+85) mm
Weight:	15.8 kg
Cut out dimensions:	581 x 301 mm
Voltage / Frequency:	120 V ~ 60 Hz
Current L35L35:	4.5 A
Starting current:	14.6 A
Max. current:	5.3 A
Nominal power L35L35:	540 W
Max. power:	600 W
Fuse:	6 A (T)
Short-circuit current rating:	5 kA
Rated current compressor:	15.2 A
Full load current fans:	5.3 A
Connection:	Connection terminal block

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE - filterless cooling units](#)

Performance graph:

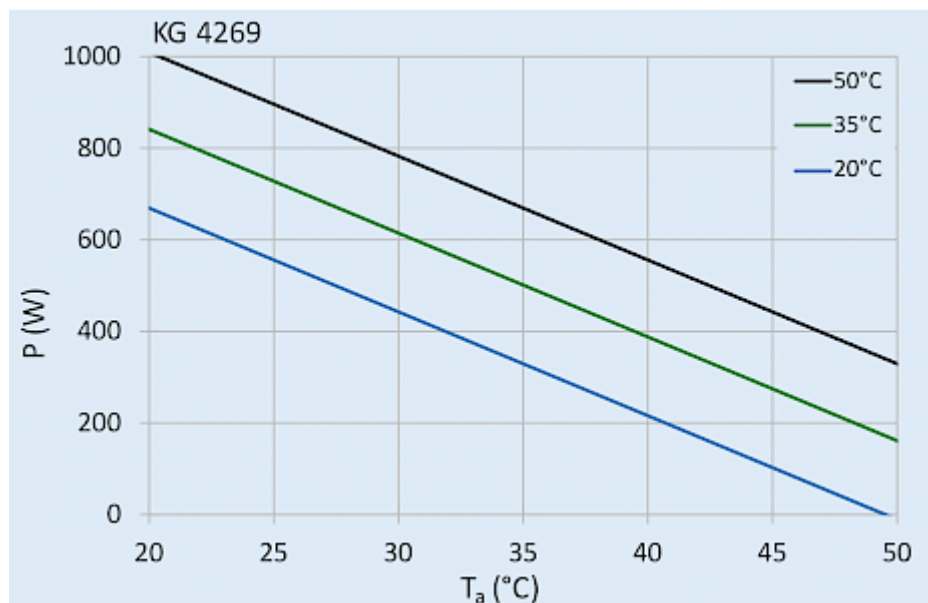


[click image to enlarge](#)

Air flow:

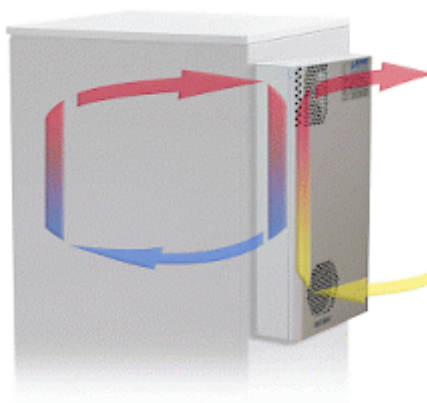

[click image to enlarge](#)

Cut Out Dimension:

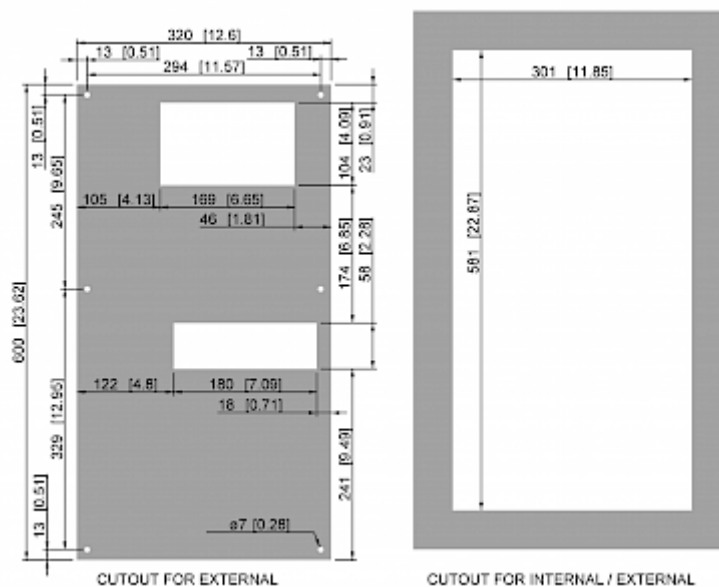

[click image to enlarge](#)