

Filter Fan



Description

Order Number:	4010D2100
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4010D2130
Approvals:	CE, cURus, cULus, CSA

Technical Data

Air flow unimpeded IP 54:	23 m³/h
Operating Temperature Range:	-10°C - +55°C
Static pressure:	44 Pa
Dimensions A x B x C (D+E):	106.5 x 106.5 x 53.6 mm
Weight:	0.35 kg
Cut out dimensions:	92.5 +0.5 x 92.5 +0.5 mm
Voltage / Frequency:	24 V DC
Rated current:	0.092 A
Power consumption:	2.2 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1 - 2 mm
Filter class (ISO 16890):	G3 gemäß EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	30 dB(A)

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:


Q = Air flow [m³/h]

P = Static pressure [Pa]

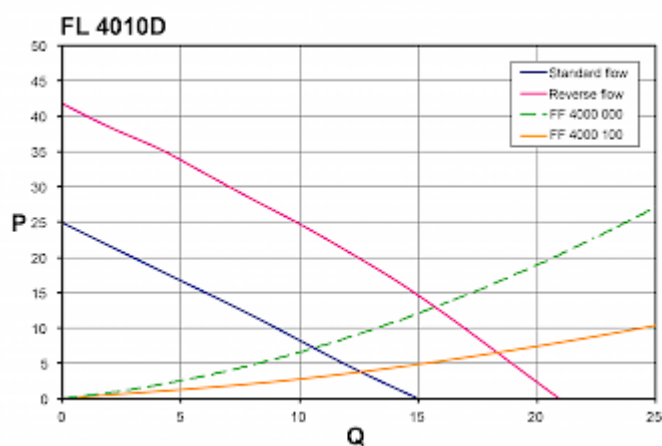

[click image to enlarge](#)

Cut Out Dimension:

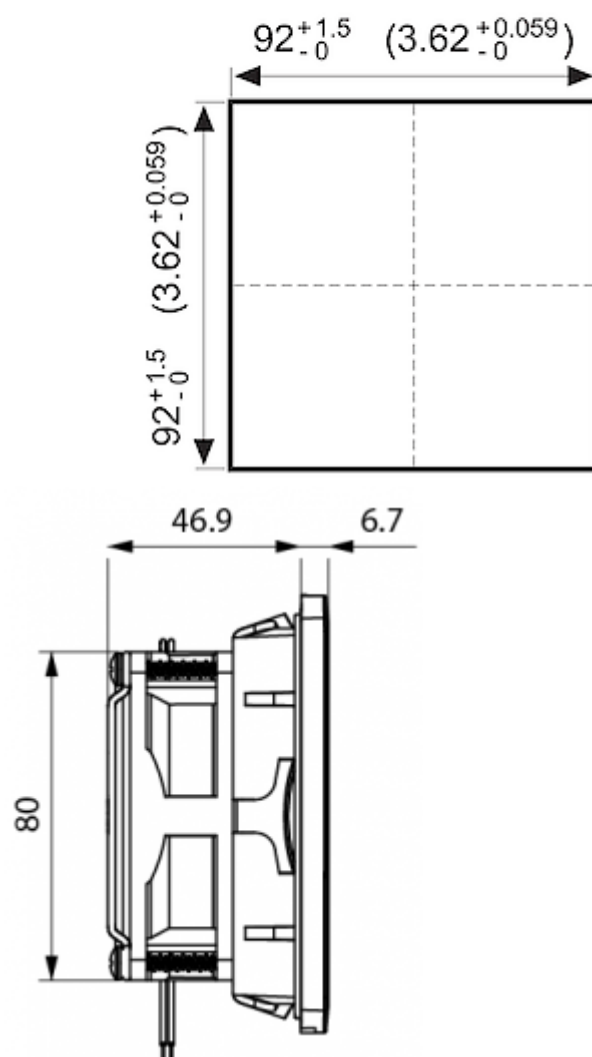

[click image to enlarge](#)

Order Information

With NEMA 3R protection part no.	4010D2130
Taric code	84145915
GTIN (EAN)	5350604100176