

Filter Fan



Description

Order Number:	4220A4000
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54, Type 12, 3R
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4220A4030
Approvals:	CE, cULus, CSA

Technical Data

Air flow unimpeded IP 54:	45 m³/h - 50 m³/h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	55 Pa @ 50 Hz 62 Pa @ 60 Hz
Dimensions A x B x C (D+E):	150 x 150 x 73.2 mm
Weight:	0.8 kg
Cut out dimensions:	124 x 124 mm (+1.5)
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.11 A / 0.10 A
Power consumption:	18 W / 17 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1 - 2.1 mm
Filter class (ISO 16890):	G3 gemäß EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	48 dB(A) @ 50 Hz 54 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)



Air flow:

Q = Air flow [m³/h]
P = Static pressure [Pa]

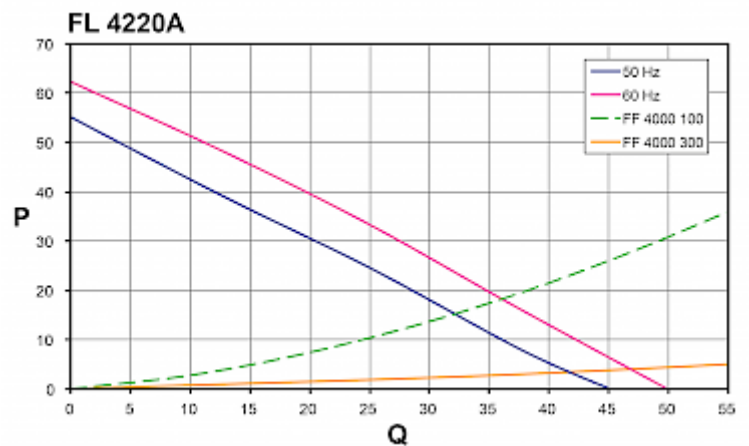

[click image to enlarge](#)

Cut Out Dimension:

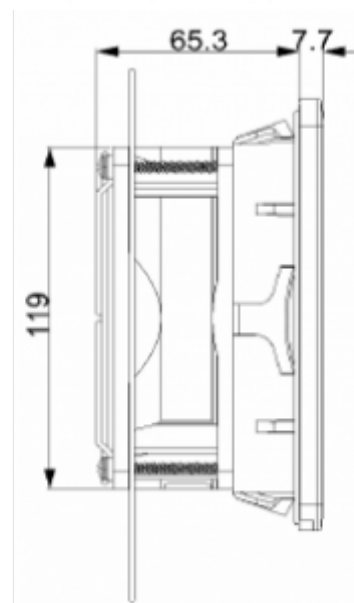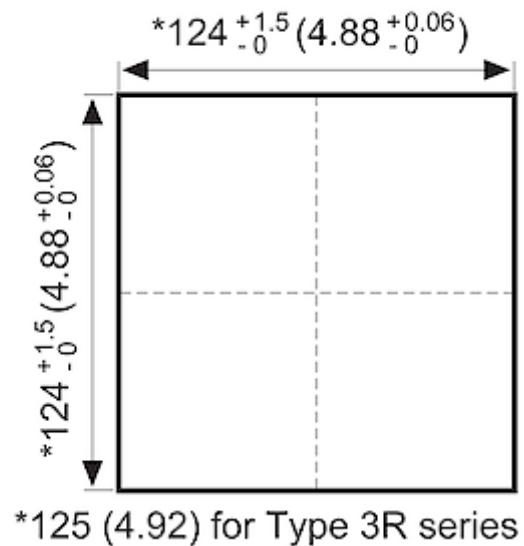

[click image to enlarge](#)

Order Information

With NEMA 3R protection part no.	4220A4030
Taric code	84145915
GTIN (EAN)	5350604100305