

Filter Fan



Description

Order Number:	4411D2000
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4411D2030
Approvals:	CE, cULus, CSA

Technical Data

Air flow volume (system / unimpeded):	100 m³/h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	60 Pa
Dimensions A x B x C (D+E):	203.9 x 203.9 x 95.5 mm
Weight:	0.9 kg
Cut out dimensions:	177 +1.5 x 177 +1.5 mm
Voltage / Frequency:	24 V DC
Rated current:	0.342 A
Power consumption:	8.2 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1 - 2.1 mm
Filter class (ISO 16890):	G3 gemäß EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	42 dB(A)


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


Air flow:

Q = Air flow [m³/h]
P = Static pressure [Pa]

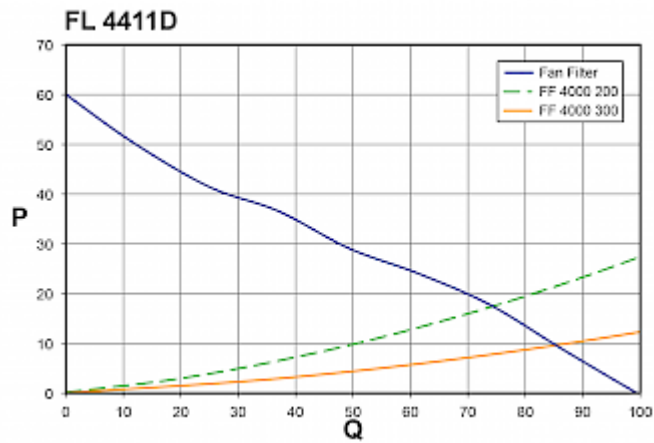

[click image to enlarge](#)

Cut Out Dimension:

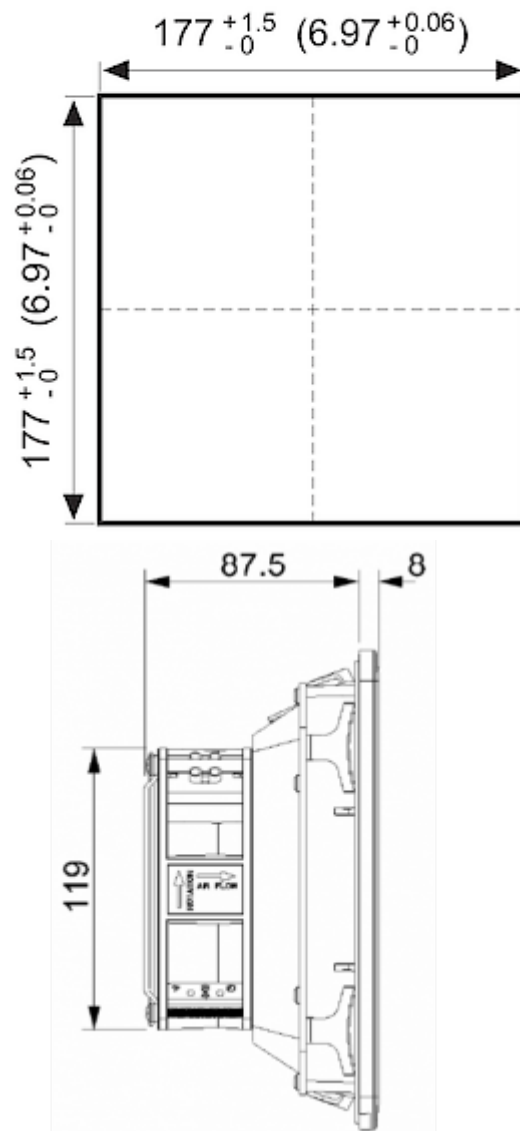

[click image to enlarge](#)

Order Information

With NEMA 3R protection part no.	4411D2030
Taric code	84145915
GTIN (EAN)	5350604100381