

Filter Fan



Description

Order Number:	4833A4000
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4833A4030
Approvals:	CE, cULus, CSA

Technical Data

Air flow unimpeded IP 54:	670 m³/h - 750 m³/h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	205 Pa @ 50 Hz 210 Pa @ 60 Hz
Dimensions A x B x C (D+E):	325 x 325 x 160.2
Weight:	4.25 kg
Cut out dimensions:	291 +1.5 x 291 +1.5
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.67 A / 0.85 A
Power consumption:	155 W / 195 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class (ISO 16890):	G3 gemäß EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

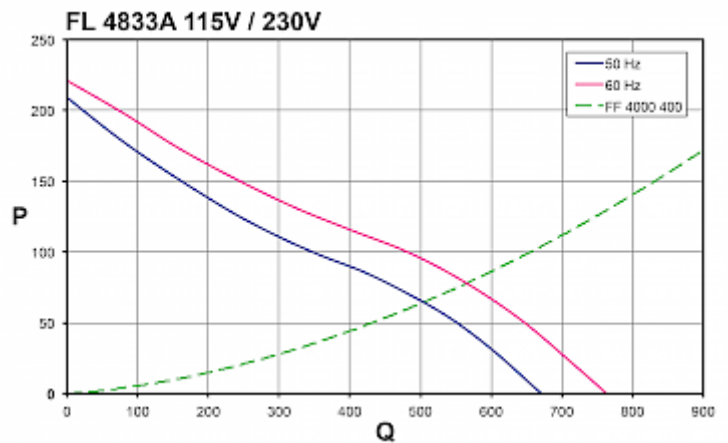

[click image to enlarge](#)

Cut Out Dimension:

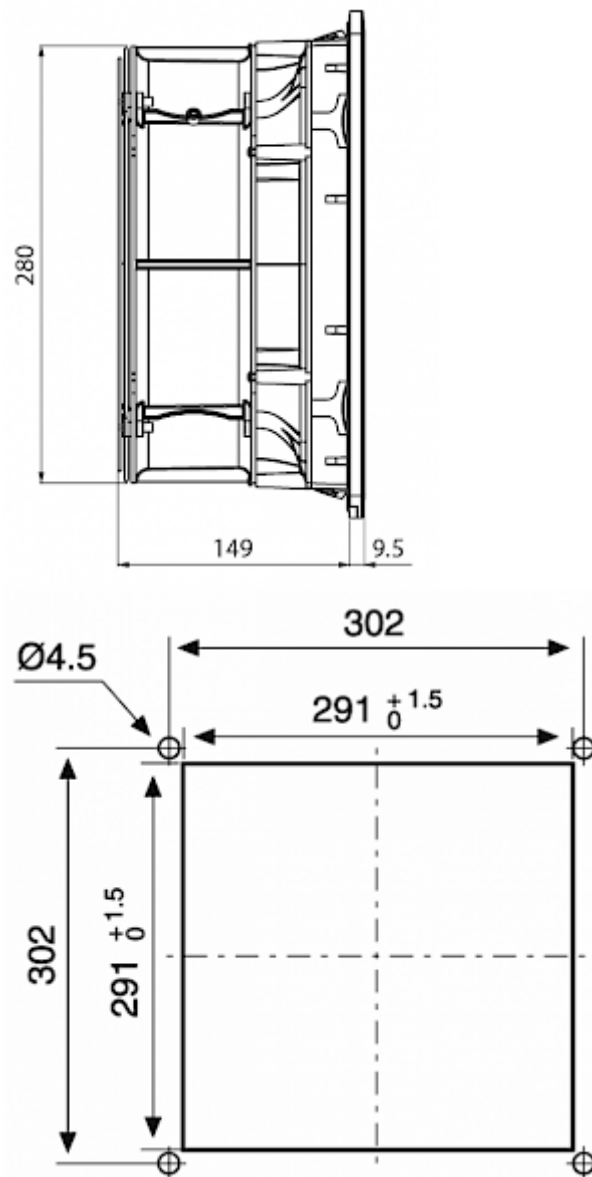

[click image to enlarge](#)

Order Information

With NEMA 3R protection part no.	4833A4030
Taric code	84145915
GTIN (EAN)	5350604100657