

Filter Fan



Description

Order Number:	4833A4100
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4833A4130
Approvals:	CE, cULus, CSA

Technical Data

Air flow unimpeded IP 54:	720 m³/h - 820 m³/h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	290 Pa @ 50Hz 280 Pa @ 60Hz
Dimensions A x B x C (D+E):	325 x 325 x 160.2
Weight:	4.25 kg
Cut out dimensions:	291 +1.5 x 291 +1.5
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.72 A / 0.88 A
Power consumption:	165 W / 205 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class (ISO 16890):	G3 gemäß EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:


Q = Air flow [m³/h]

P = Static pressure [Pa]

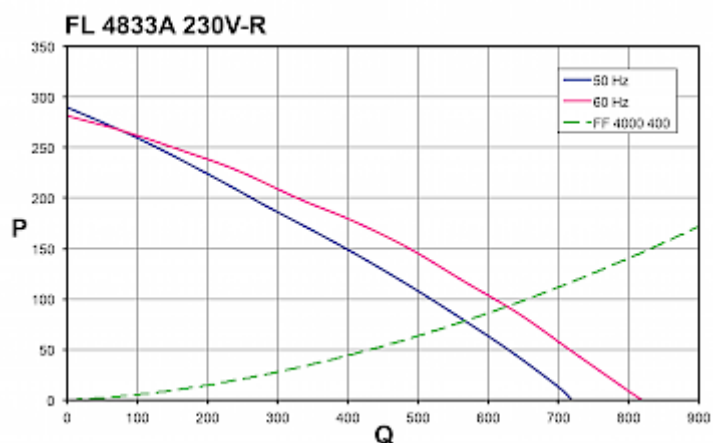

[click image to enlarge](#)

Cut Out Dimension:

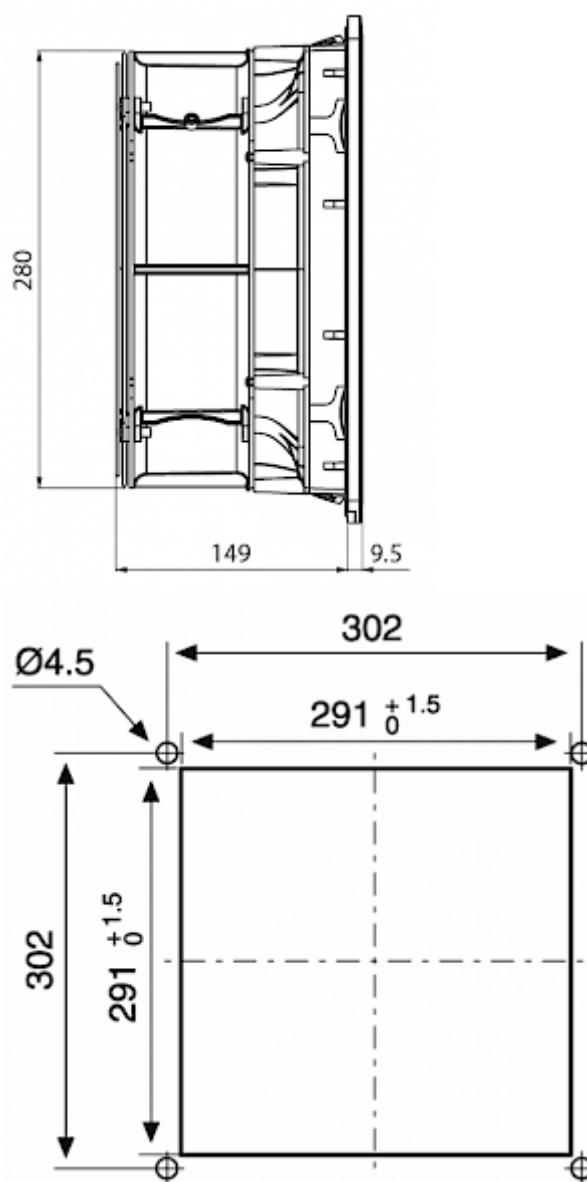

[click image to enlarge](#)

Order Information

With NEMA 3R protection part no.	4833A4130
Taric code	84145915
GTIN (EAN)	5350604100671