

Sensor operated LED lamp. Only for installation inside industrial control cabinets.



Desc	7	nt	$\mathbf{I} \cap$	n
DESC	1	V.	IU	ш

Order Number:

Order Number.	490301012	
Colour:	RAL 9003	
Housing Material:	Mild steel, powder coated	
IP protection class to EN 60 529:	IP 20	
Included:	Motion sensor Daisy Chain max. 10	
SK notes:	Suitable for damp locations	
Approvals:	CE, cURus	
UL File Number:	E358386	

490561612

Accessories:

	Power cable DC black, 0.7 m
-	Power cable DC black, 3 m
	Daisy Chain cable DC black, 0.7 m

Daisy Chain cable AC black, 1.2 m



Technical Data

Operating Temperature Range:	-30°C - 50°C	
Mounting:	M5 screws (x2)	
Dimensions A x B x C (D+E):	420 x 90 x 45 mm	
Weight:	2 kg	
Voltage / Frequency:	24 V DC	
Voltage tolerance:	Only use SELV-DC power sources	
Rated current:	5 A	
Power consumption:	12 W	
Lamp:	EB-7801	
Luminosity:	1500 lm / 5100 K	
Lifetime:	60,000 hrs. @ 20°C	
Connection:	Recommended external backup fuse: 7 A (T)	


Please click on the graphics to download.

More CAD drawings can be found under Product Download.

> Overview Product Group Energy-saving LED enclosure Lamps





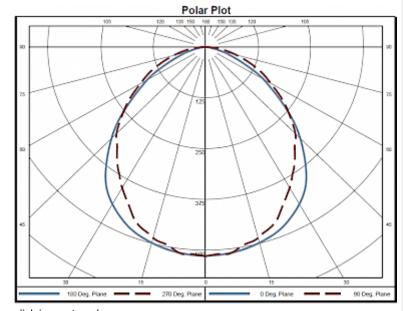

click image to enlarge



Order Information

Taric code 94054990