

Thermoelectric cooling unit



Description

Order Number:	6205303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
IP protection class to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	 Condensate Kit 3102 / 6155 / 6205

Technical Data


Cooling capacity L35L35 (EN14511-3):	200 W
Air flow volume (system / unimpeded):	Ambient air circuit: 106 / 260 m³/h Cabinet air circuit: 150 / 260 m³/h
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Mounting:	Recessed
Dimensions A x B x C (D+E):	500 x 330 x 190 (130+60) mm
Weight:	17.2 kg
Cut out dimensions:	472 x 302 mm
Voltage / Frequency:	120 V, 230 V
Current L35L35:	2.1 A @ 120 V 1.1 A @ 230 V
Starting current:	3.2 A @ 120 V 1.7 A @ 230 V
Max. current:	2.2 A @ 120 V 1.2 A @ 230 V
Nominal power L35L35:	250 W
Max. power:	270 W
Fuse:	4 A (T) @ 120 V 3 A (T) @ 230 V
Connection:	4 pole power connector 5 pole connector for signals

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLITHERM PELTIER - cooling units without refrigerant](#)

Performance graph:

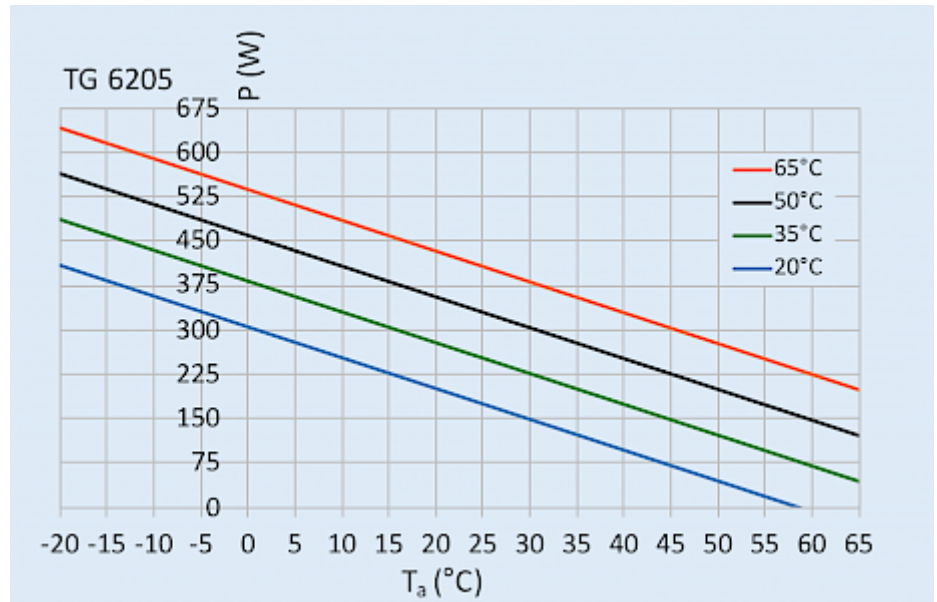

[click image to enlarge](#)

Dimensions:

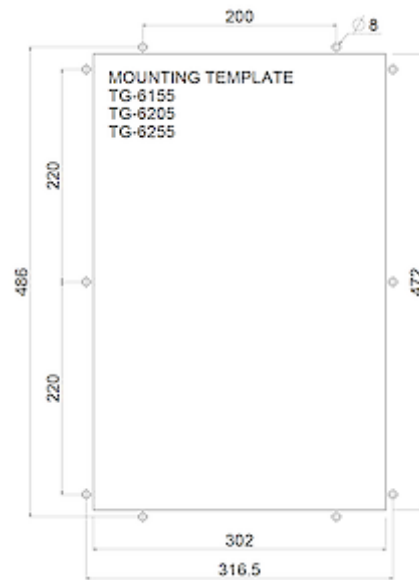

[click image to enlarge](#)

Order Information

Stainless steel AISI 316 (V4A) housing part no.	62053034
Box dimension	586.6 x 354 x 227 mm
Gross weight	20.5 kg
Taric code	84158300