

Outdoor filter fan SF 4714 - 24V



Description

Order Number:	4714322203
Brand Name:	SOLIVENT PRO
Colour:	RAL 9005
Housing Material:	PC plastic / RAL 7035
IP protection class to EN 60 529:	IP 54
UL Typ (UL 50E):	12, 3R
Note:	IP 55 with filter O3 (see manual)
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Technical Data


Air flow unimpeded IP 54:	59 m³/hr
Air flow with exhaust filter IP 54:	42 m³/hr
Operating Temperature Range:	-40°C - 60°C
Storage temperature range:	-40°C - 70°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	147.5 x 147.5 x 82.6 (11.6+71) mm
Weight:	0.6 kg
Cut out dimensions:	124 x 124 mm
Voltage / Frequency:	24 V DC
Rated current:	0.21 A
Power consumption:	5 W
Noise level:	44.5 dB(A)
Fuse:	1 A (T)
Connection:	Spring clamp

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Air flow:

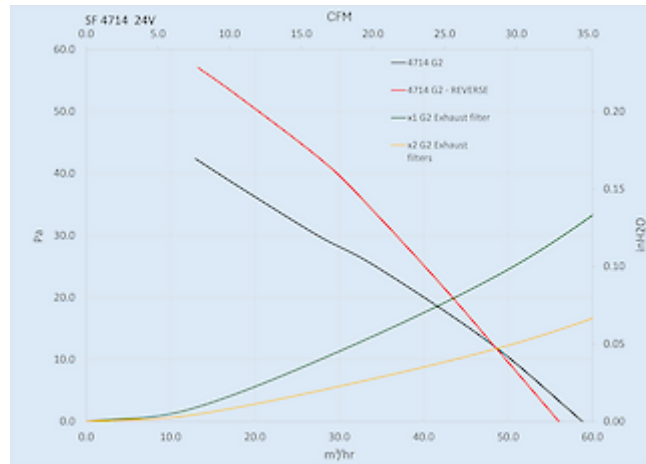


[click image to enlarge](#)

Cooling capacity:

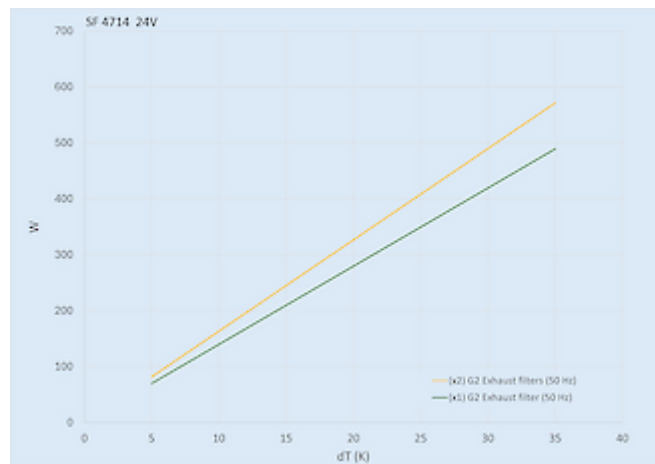

[click image to enlarge](#)

Dimensions:

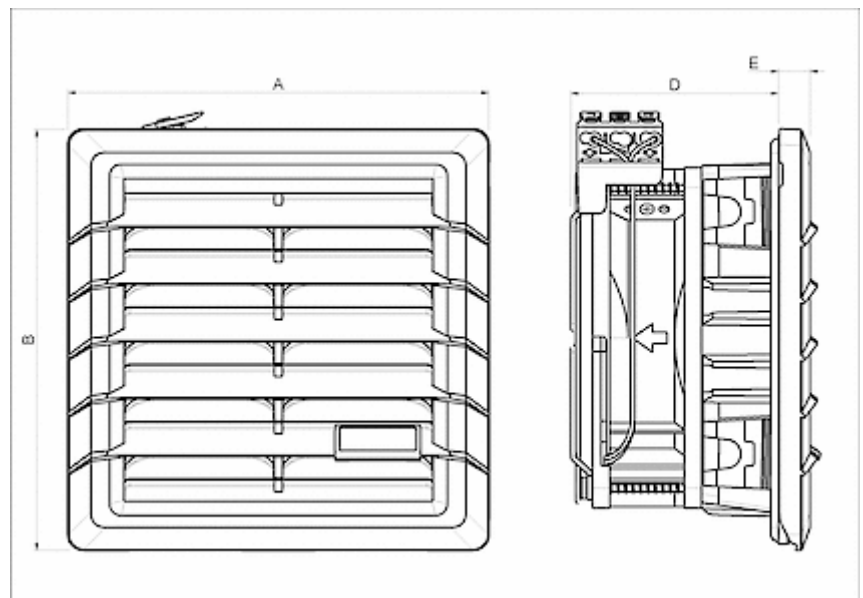

[click image to enlarge](#)

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m ³ /h) ²⁾	Air flow with exhaust filter (m ³ /h)
4714322203	54	12 / 3R	RAL 9005	B	59 m ³ /hr	42 m ³ /hr
4714323201	55	12 / 3R	RAL 7035	B	39 m ³ /hr	28 m ³ /hr
4714323203	55	12 / 3R	RAL 9005	B	39 m ³ /hr	28 m ³ /hr
471432R2201	54	12 / 3R	RAL 7035	S	56 m ³ /hr	
471432R2203	54	12 / 3R	RAL 9005	S	56 m ³ /hr	
471432R3201	55	12 / 3R	RAL 7035	S	47 m ³ /hr	
471432R3203	55	12 / 3R	RAL 9005	S	47 m ³ /hr	

¹⁾ B = Blowing – from ambient into the enclosure (standard version)
S = Suction – from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz