

Filter fan SF 4720 - 24V



Description

Order Number:	4720352201
Brand Name:	SOLIVENT PRO
Colour:	RAL 7035
Housing Material:	PC plastic
IP protection class to EN 60 529:	IP 54
UL Typ (UL 50E):	12
Note:	IP 55 with filter O3 (see manual)
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Accessories:



[Hose-proof protection hood FC 4000 200](#)



[Hose-proof protection hood FC 4000 200 FDA](#)

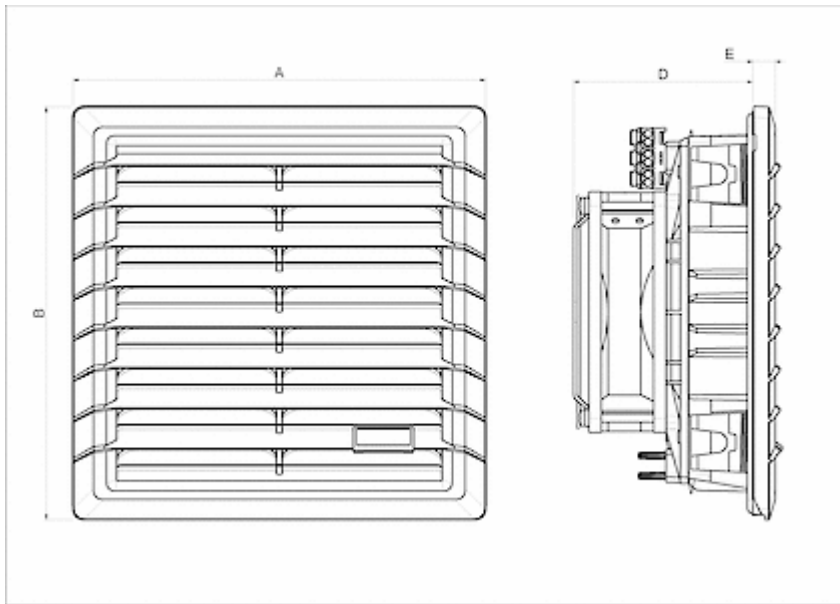
Technical Data

Air flow unimpeded IP 54:	130 m³/hr
Air flow with exhaust filter IP 54:	85 m³/hr
Operating Temperature Range:	-10°C - 60°C
Storage temperature range:	-40°C - 70°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	204.5 x 204.5 x 98.7 (11.6+87.1) mm
Weight:	0.8 Kg
Cut out dimensions:	177 x 177 mm
Voltage / Frequency:	24 V DC
Rated current:	0.5 A
Power consumption:	12 W
Wall thickness:	1-3 mm
Noise level:	50 dB(A)
Fuse:	1 A (T)
Connection:	Spring terminal

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Dimensions:

[click image to enlarge](#)

Order Information