

Cabinet cooling unit



Description

Order Number:	85629576
Brand Name:	SLIMLINE PRO
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 55 / Type 12
Approvals:	CE, cURus, cULus

Technical Data

Cooling capacity L35L35 (EN14511-3):	6000 W @ 50 Hz 6200 W @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	5000 W @ 50 Hz 5500 W @ 60 Hz
EER L35L35:	2.0
Compressor type:	Scroll
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	1165g / 41.1 oz.
High / low Pressure:	32 / 6 bar 460 / 88 psi
Air flow volume (system / unimpeded):	Ambient air circuit: 1000 / 1400 m³/h Cabinet air circuit: 850 / 1200 m³/h
Operating Temperature Range:	10°C - 55°C
UL temperature range:	10°C - 55°C
Mounting:	Wall mounted / recessed
Dimensions A x B x C (D+E):	1550 x 455 x 326 (376.5) mm
Weight:	72 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V / 60Hz 3~
Current L35L35:	6.5 A @ 50 Hz 6.7 A @ 60 Hz
Starting current:	52 A
Max. current:	10 A
Nominal power L35L35:	3.4 kW @ 50 Hz 4.3 kW @ 60 Hz
Max. power:	6.8 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	6.4 A

Full load current fans:

1.3 A

Connection:

4 pole terminal block for power

5 pole terminal block for signals


3 pole terminal block for RS 485

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE PRO - cooling units in a new design](#)

Performance graph:

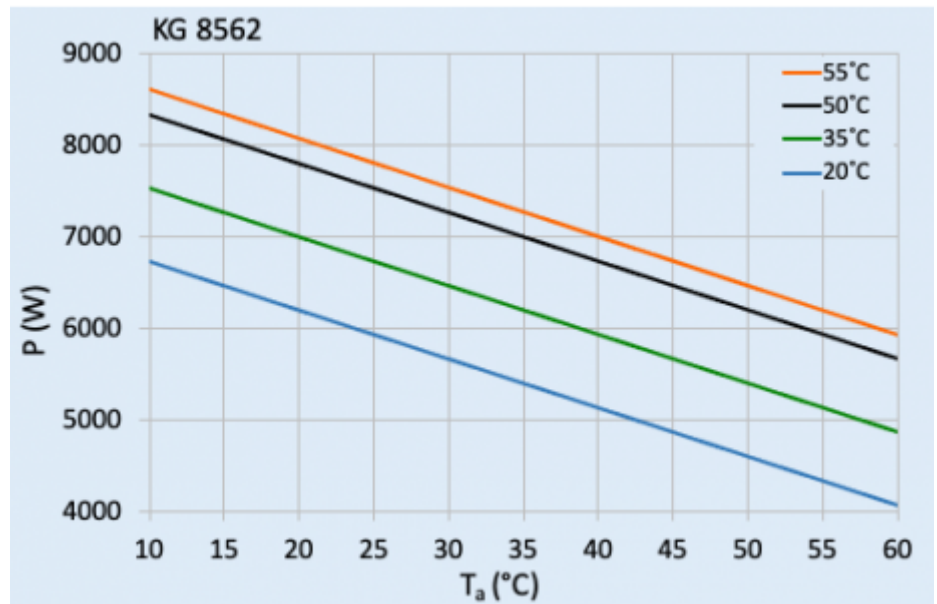

[click image to enlarge](#)

Dimensions:

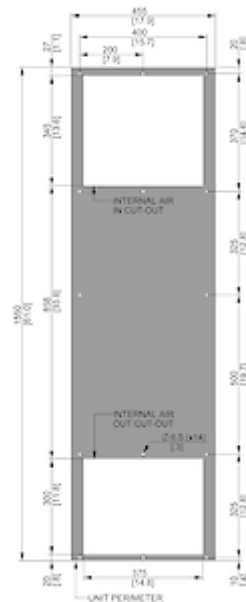

[click image to enlarge](#)

Order Information

Box dimensions	1642 x 555 x 299 mm
Gross weight	80.5 Kg
Taric code	84158200