

Air / Water Heat Exchanger



Description

Order Number:	2125100
Brand Name:	SLIMLINE HEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 54
Note:	With Solenoid valve
Approvals:	CE



Technical Data

Cooling capacity L35W10 (200 l/h):	2500 W
Cooling capacity L35W10 (500 l/h):	3.15 kW (only w/o water flow regulator)
Coolant:	Water, light oils or similar
Air flow volume (system / unimpeded):	530 / 1300 m³/h
Operating Temperature Range:	1°C - 72°C
Mounting:	Wall mounted / internal
Dimensions A x B x C (D+E):	936 x 262 x 146.5 mm
Weight:	18 kg
Voltage / Frequency:	120 V ~ 60 Hz
Starting current:	3 A
Max. current:	1.7 A
Max. power:	200 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 10mm
Fuse:	5 A (T)
Connection:	Connection terminals

Please click on the graphics to download.


More CAD drawings can be found under Product Download.

> Overview Product Group SLIMLINE HEX - air/water heat exchangers




Performance graph:

Δ T = Temperature difference between air intake and cooling P = Cooling capacity

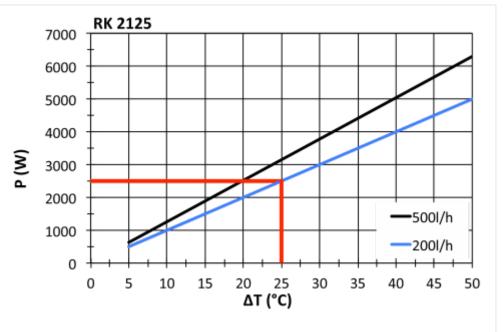


click image to enlarge

Air flow:



click image to enlarge

Dimensions:



click image to enlarge