

Filter Fan



Description

Order Number:	4880A9000
Colour:	RAL 7035
Housing Material:	ABS Plastic
Ingress Protection:	IP 54
Optional:	Different housing colours available on request
Approvals:	CE, cULus, CSA

Technical Data

Operating Temperature Range:	-10°C - +70°C
Air flow unimpeded:	618 m³/h - 690 m³/h
Static pressure:	245 Pa @ 50 Hz / 290 Pa @ 60 Hz
Mounting:	Elastic clips or by 4 self-threading screws
Dimensions A x B x C (D+E):	325 x 325 x 158.5 mm
Weight:	3.7 kg
Cut out dimensions:	291 +1.5 x 291 +1.5 mm
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Rated current:	0.10 A / 0.12 A
Power consumption:	70 W / 85 W
Degree of separation:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class:	G3 gemäß EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	69 dB(A) @ 50 Hz / 72 dB(A) @ 60 Hz

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Air flow:


Q = Air flow [m³/h]

P = Static pressure [Pa]

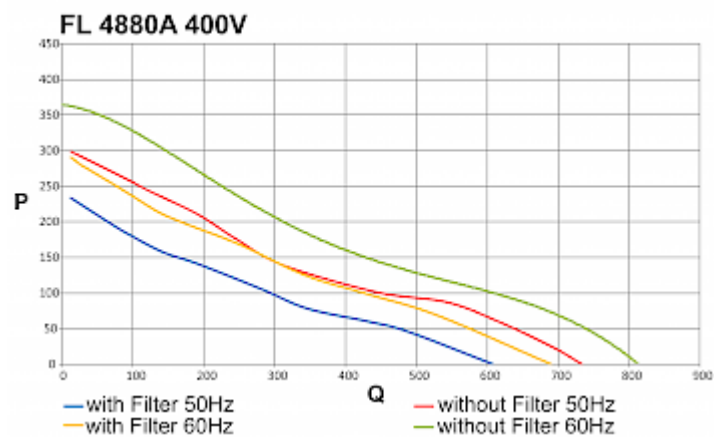

[click image to enlarge](#)

Cut Out Dimension:

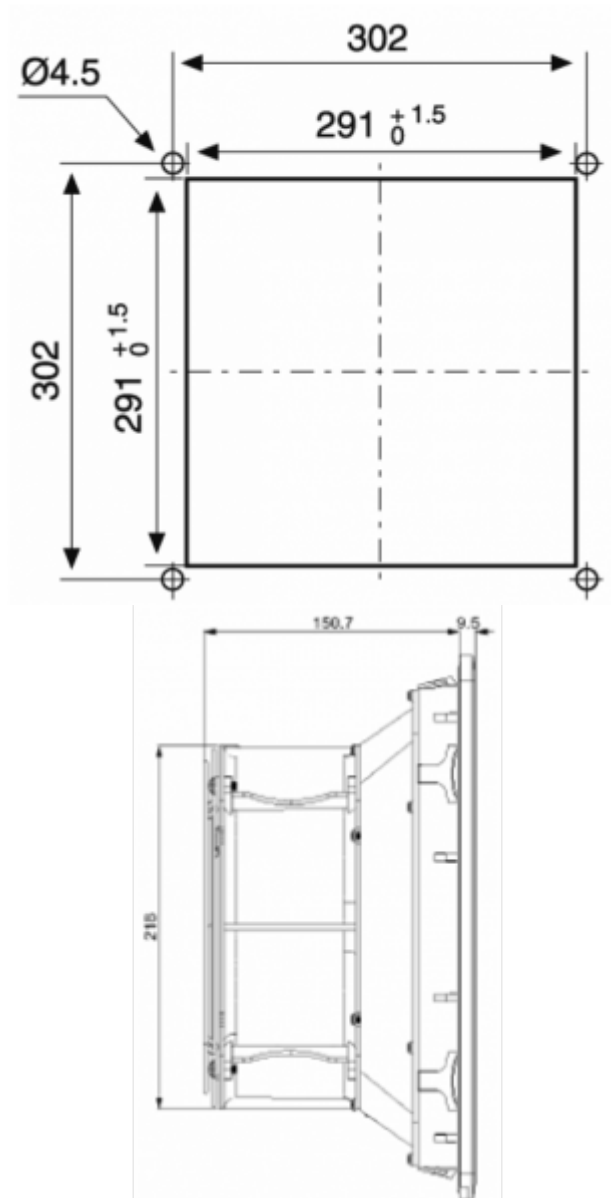

[click image to enlarge](#)