

Filterless enclosure cooling unit



Description


| | |
|----------------------------|---------------------------|
| Order Number: | 42670001 |
| Brand Name: | SLIMLINE |
| Colour: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress Protection: | IP 54 / TYPE 12 |
| Approvals: | CE, cURus, cULus |

Technical Data

| | |
|--|--|
| Cooling capacity L35L35: | 400 W @ 50 Hz 425 W @ 60 Hz |
| Cooling capacity L35L50: | 195 W @ 50 Hz 220 W @ 60 Hz |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 111 g / 3.9 oz |
| High / low Pressure: | 23 / 4.5 bar 337 / 66 psig |
| Operating Temperature Range: | 10°C - 50°C |
| Air flow volume (system / unimpeded): | Ambient air circuit: 215 / 450 m ³ /h Cabinet air circuit: 115 / 250 m ³ /h |
| Mounting: | Wall mounted / recessed |
| Dimensions A x B x C (D+E): | 340 x 520 x 110 (25+85) mm |
| Weight: | 14.8 kg |
| Cut out dimensions: | 321 x 501 mm |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current L35L35: | 1.6 A @ 50 Hz 1.5 A @ 60 Hz |
| Starting current: | 3.2 A |
| Max. current: | 2.3 A |
| Nominal power L35L35: | 350 W @ 50 Hz 346 W @ 60 Hz |
| Max. power: | 410 W |
| Fuse: | 6 A (T) |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 3.1 A |
| Full load current fans: | 2.3 A |
| Connection: | Connection terminal block |


Please click on the graphics to download.
More CAD drawings can be found under [Product Download](#).
> [Overview Product Group SLIMLINE - filterless cooling units](#)

Performance graph:

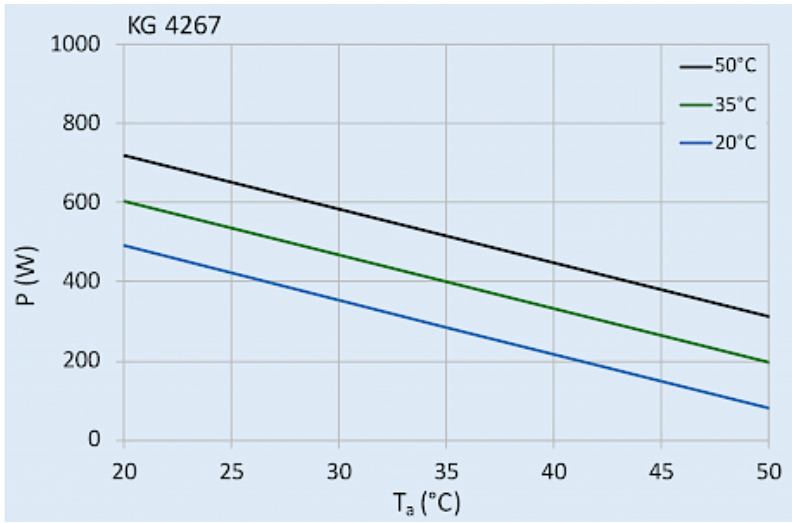


click image to enlarge

Air flow:

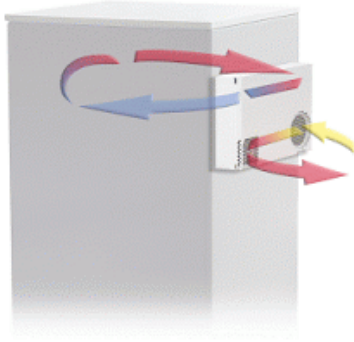

click image to enlarge

Cut Out Dimension:

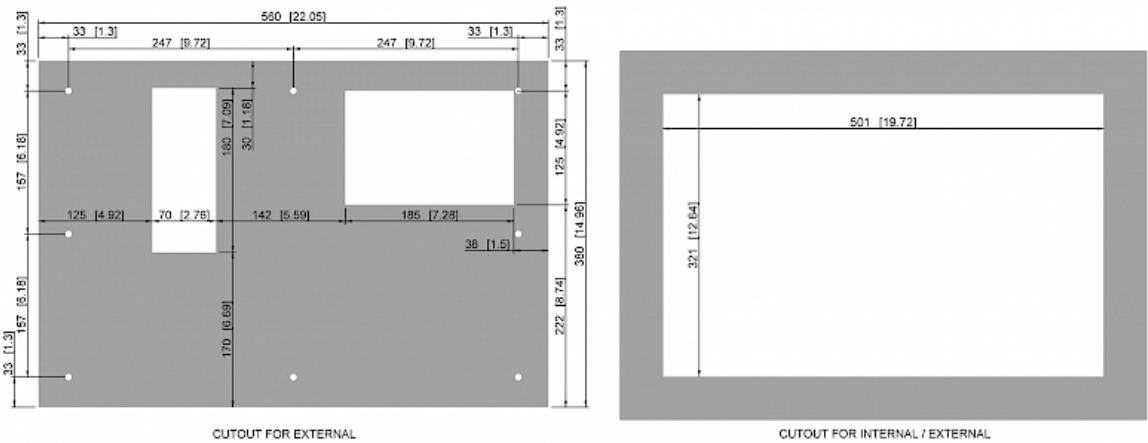

click image to enlarge

Order Information

Box dimensions 577 x 442 x 156.5 mm

Gross weight 17 kg

Taric code 84158200

GTIN (EAN) 5350604370173