

Control Cabinet Air Conditioner



Description

Order Number:	43040001
Brand Name:	COMPACT INDOOR
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54 / TYPE 12
Approvals:	CE, cURus, cULus


Accessories:



[Stainless Steel Filter Holder 4304](#)



[Fibre Filter Media 4304](#)




[Washable Aluminium Filter 4304](#)

Technical Data

Cooling capacity L35L35:	320 W @ 50 Hz 360 W @ 60 Hz
Cooling capacity L35L50:	200 W @ 50 Hz 220 W @ 60 Hz
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	79 g / 2.78 oz
High / low Pressure:	25 / 6 bar 365 / 88 psig
Operating Temperature Range:	10°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 90 / 250 m ³ /h Cabinet air circuit: 115 / 136 m ³ /h
Mounting:	External
Dimensions A x B x C (D+E):	501.6 x 280 x 200 mm
Weight:	19.5 kg
Cut out dimensions:	480 x 240 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current L35L35:	1.9 A @ 50 Hz 2.0 A @ 60 Hz
Starting current:	6.1 A
Max. current:	2.8 A
Nominal power L35L35:	335 W @ 50 Hz 380 W @ 60 Hz
Max. power:	550 W
Fuse:	6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group COMPACT INDOOR - reliable and economical](#)

Performance graph:

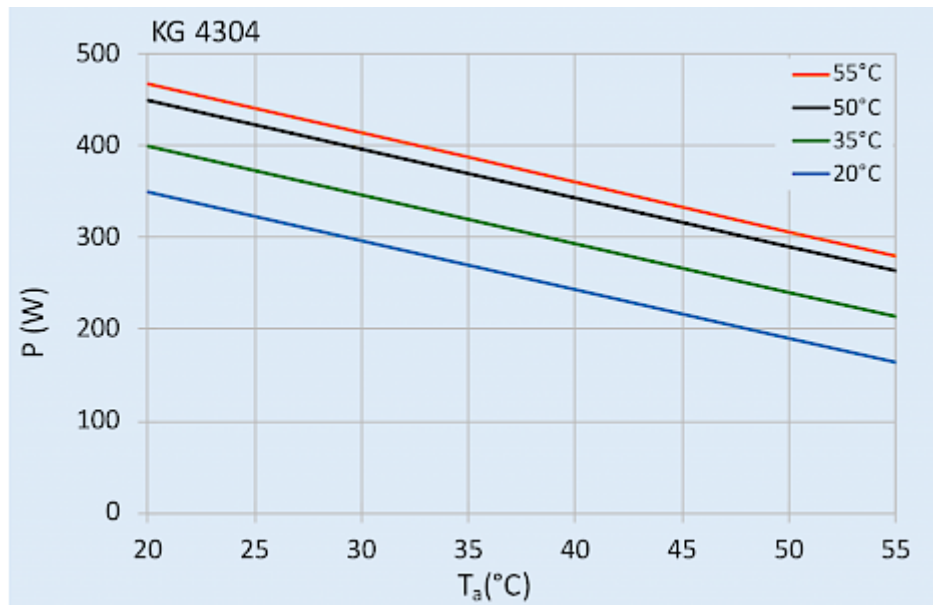


[click image to enlarge](#)

Air flow:

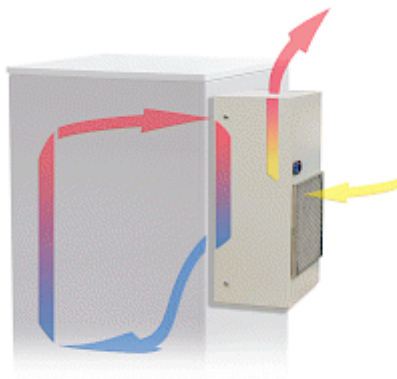

[click image to enlarge](#)

Cut Out Dimension:

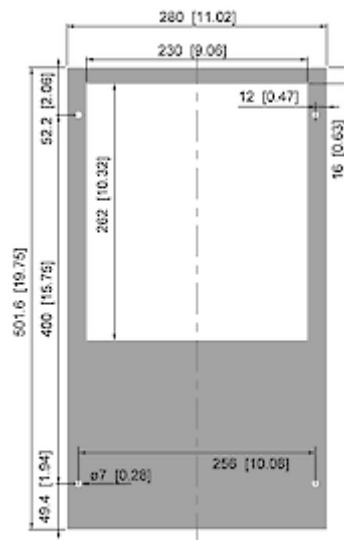

CUTOUT FOR EXTERNAL

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	4304002
Box dimensions	535 x 323 x 225 mm
Gross weight	19 kg
Taric code	84158200
GTIN (EAN)	5350604360006