


Roof mounted cooling unit

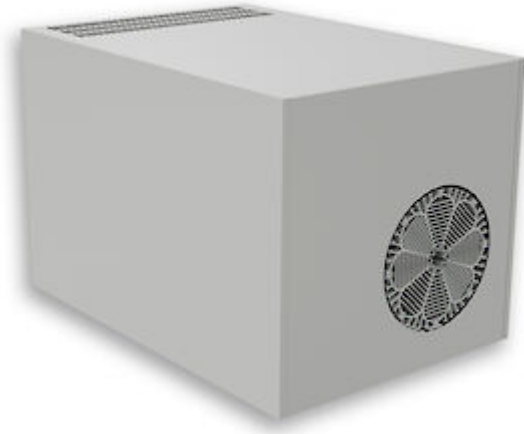

Description

Order Number:	45552001
Brand Name:	SLIMLINE TOP
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54
Approvals:	CE, cURus

Technical Data


Cooling capacity L35L35:	1.10 kW @ 50 Hz 1.15 kW @ 60 Hz
Cooling capacity L35L50:	700 W @ 50 Hz 750 W @ 60 Hz
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R 134a / 1430
Refrigerant charge:	500 g / 17.6 oz
High / low Pressure:	35 / 6 bar 508 / 88 psig
Operating Temperature Range:	10°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 360 / 1200 m³/h Cabinet air circuit: 500 / 650 m³/h
Mounting:	Roof mounted
Dimensions A x B x C (D+E):	400 x 400 x 600 mm
Weight:	55 kg
Cut out dimensions:	108 x 530 mm (x2)
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Current L35L35:	2.3 A @ 50 Hz 2.5 A @ 60 Hz
Starting current:	8.2 A
Max. current:	2.8 A
Nominal power L35L35:	800 W @ 50 Hz 900 W @ 60 Hz
Max. power:	1.09 kW
Fuse:	3 x 6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE PRO TOP - roof mounted cooling units](#)

Performance graph:

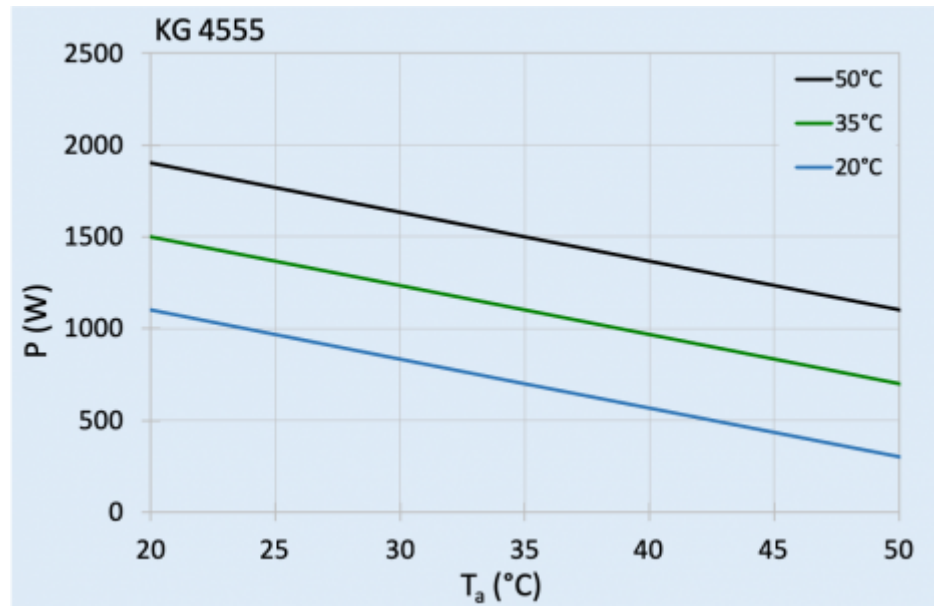


[click image to enlarge](#)

Air flow:

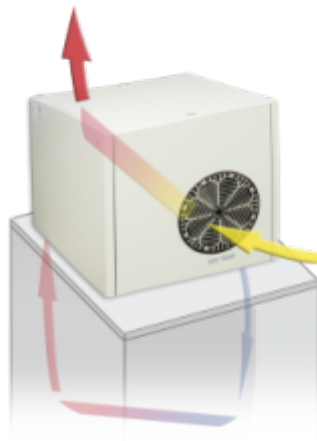

[click image to enlarge](#)

Cut Out Dimension:

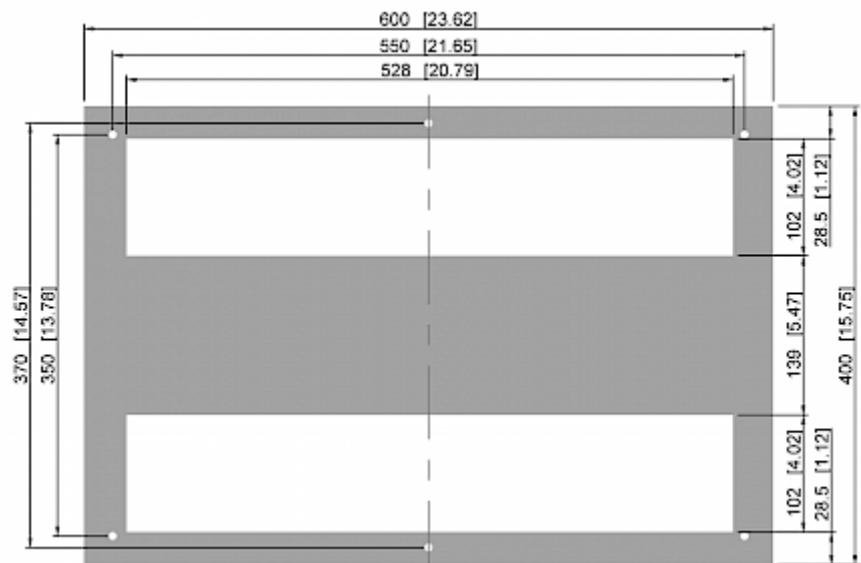

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	4555202
Taric code	84158200
GTIN (EAN)	5350604330115