

Motion sensor operated enclosure LED lamp



Description

Order Number: 490515612

Colour: RAL 9003

Housing Material: Mild steel, powder coated

Ingress Protection: IP 20

Included: Motion sensor

NEMA 5-15 outlet (max. 10.6 A)

Door contact ready Daisy Chain max. 10

Note: Door Switch has to be ordered separately

part no. 490505

Approvals: CE

UL File Number: -



Accessories:

Power cable AC orange, 0.7 m

Power cable AC black, 3 m

Power cable AC orange, 3 m

Daisy Chain cable AC black, 0.7 m

Daisy Chain cable AC orange, 0.7 m

Power cable AC black, 0.7 m

Daisy Chain cable AC black, 1.2 m

Daisy Chain cable AC orange, 1.2 m

Door contact switch



Technical Data

Operating Temperature Range:	-30°C - 50°C
Mounting:	M5 screws (x2)
Dimensions A x B x C (D+E):	420 x 90 x 45 mm
Weight:	2 kg
Voltage / Frequency:	115 V ~ 50/60 Hz
Rated current:	10.6 A
Power consumption:	16 W
Lamp:	EB-7801
Luminosity:	1500 lm / 5100 K
Lifetime:	60,000 hrs. @ 20°C
Connection:	Recommended external backup fuse: 17 A (T) or circuit breaker C16


Please click on the graphics to download.

More CAD drawings can be found under Product Download.

> Overview Product Group STRIPLITE - LED Enclosure Lights



Performance graph:

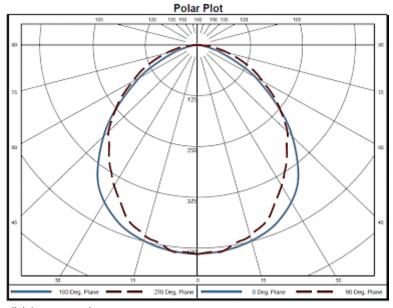

click image to enlarge



Order Information

Taric code 94054099