

Motion Sensor operated LED lamp



Description

| | |
|----------------------------|---|
| Order Number: | 490566612 |
| Colour: | RAL 9003 |
| Housing Material: | Mild steel, powder coated |
| Ingress Protection: | IP 20 |
| Included: | Motion sensor Door contact ready Daisy Chain max. 10 |
| Note: | Door Switch has to be ordered separately part no. 490505 |
| Approvals: | CE, cURus |
| UL File Number: | E358386 |

Accessories:



Power cable DC black, 0.7 m



Power cable DC black, 3 m



Daisy Chain cable DC black, 0.7 m



Daisy Chain cable AC black, 1.2 m



Door contact switch

Technical Data


| | |
|-------------------------------------|---|
| Operating Temperature Range: | -30°C - 50°C |
| Mounting: | M5 screws (x2) |
| Dimensions A x B x C (D+E): | 420 x 90 x 45 mm |
| Weight: | 2 kg |
| Voltage / Frequency: | 24 V DC only use SELV-DC power sources |
| Rated current: | 5 A |
| Power consumption: | 12 W |
| Lamp: | EB-7801 |
| Luminosity: | 1500 lm / 5100 K |
| Lifetime: | 60,000 hrs. @ 20°C |
| Connection: | Recommended external backup fuse: 7 A (T) |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group STRIPLITE - LED Enclosure Lights](#)

Performance graph:

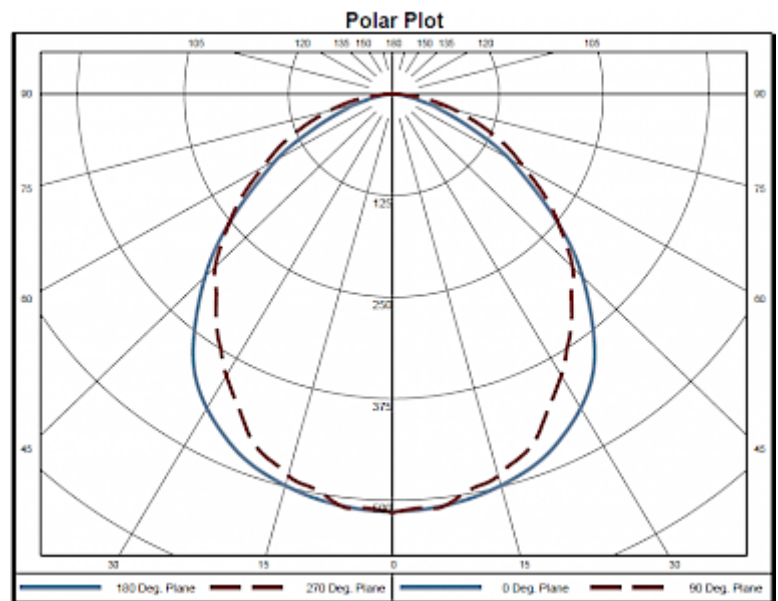

[click image to enlarge](#)

Order Information

Taric code

94054099