

Outdoor cooling unit



Description

Order Number:	570920001
Brand Name:	Compact Outdoor
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical Data

Cooling capacity L35L35 (EN14511-3):	850 W @ 50 Hz 880 W @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	610 W @ 50 Hz 660 W @ 60 Hz
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	195 g / 6.9 oz
High / low Pressure:	30 / 6.1 bar 435 / 88 psig
Operating Temperature Range:	-40°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 410 / 850 m ³ /h Cabinet air circuit: 200 / 250 m ³ /h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	830 x 304 x 270 mm
Weight:	37 kg
Cut out dimensions:	635 x 275 mm
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current L35L35:	2.1 A @ 50 Hz 2.3 A @ 60 Hz
Starting current:	10 A
Max. current:	2.5 A
Nominal power L35L35:	730 W @ 50 Hz 770 W @ 60 Hz
Max. power:	870 W
Fuse:	2 x 5 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Please click on the graphics to download.
More CAD drawings can be found under [Product Download](#).


> [Overview Product Group COMPACT OUTDOOR - OLD](#)

Performance graph:

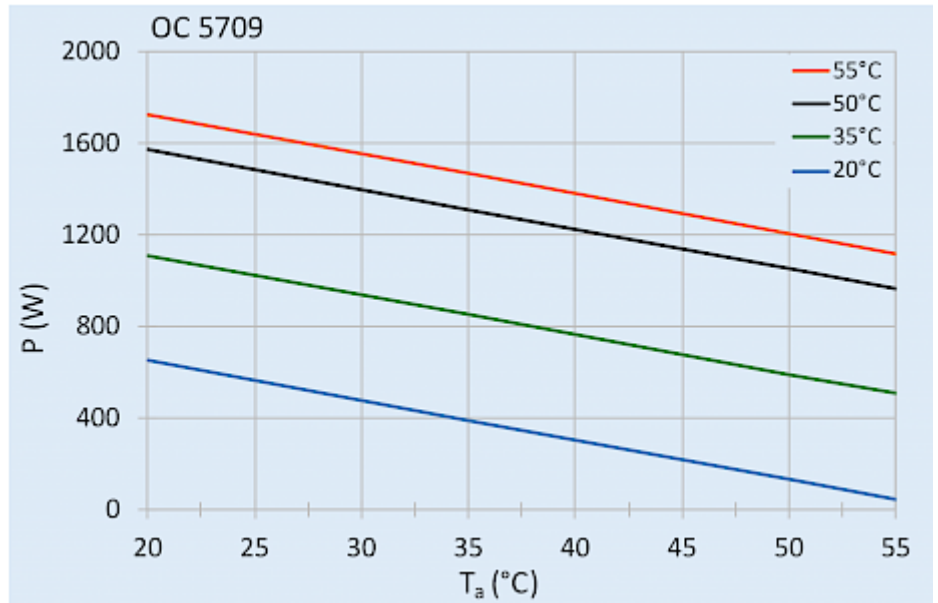

click image to enlarge

Cut Out Dimension:

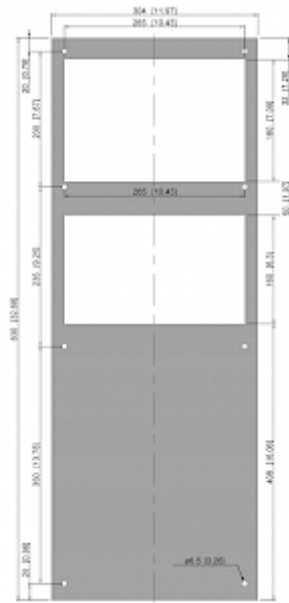

click image to enlarge

Order Information

Without 400 W enclosure heater part no.	570920001
With 400 W enclosure heater part no.	570921001
Box dimensions	870 x 348 x 310 mm
Gross weight	39 kg
Taric code	84158200