

Outdoor Air Conditioner



Description

Order Number:	871220201USL
Brand Name:	SOLITHERM PROGRESSIVE
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4
Included:	Metal mesh filter
Approvals:	CE, UL(ACVS), cULus
UL File Number:	SA32278

Technical Data

Cooling capacity L35L35:	1.12 kW @ 50 Hz 1.20 kW @ 60 Hz
Cooling capacity L35L50:	980 W @ 50 Hz 1.1 kW @ 60 Hz
EER L35L35:	1.64 / 1.5
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R 134a / 1430
Refrigerant charge:	210 g / 7.5 oz
High / low Pressure:	30 / 6 bar 435 / 88 psi
Operating Temperature Range:	-40°C - 60°C
UL temperature range:	-40°C - 60°C
Air flow volume (system / unimpeded):	Ambient air circuit: 280 / 550 m³/h Cabinet air circuit: 300 / 470 m³/h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	585 x 305 x 305 mm
Weight:	35 kg
Cut out dimensions:	345 x 235 mm
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	460 V / 60Hz 2~
Current L35L35:	2.0 A @ 50 Hz 1.85 A @ 60 Hz
Starting current:	8.6 A
Max. current:	2.3 A
Nominal power L35L35:	740 W @ 50 Hz 835 W @ 60 Hz
Max. power:	1.05 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A


Short-circuit current rating:	5 kA
Rated current compressor:	1.3 A
Full load current fans:	0.4 A
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group Enclosure air conditioners - Progressive Line](#)

Performance graph:

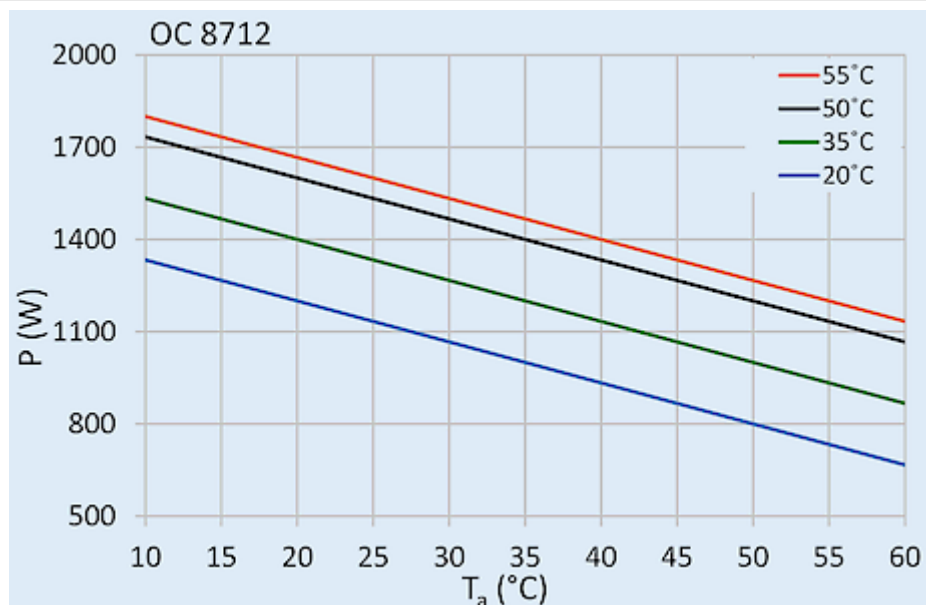

[click image to enlarge](#)

Cut Out Dimension:

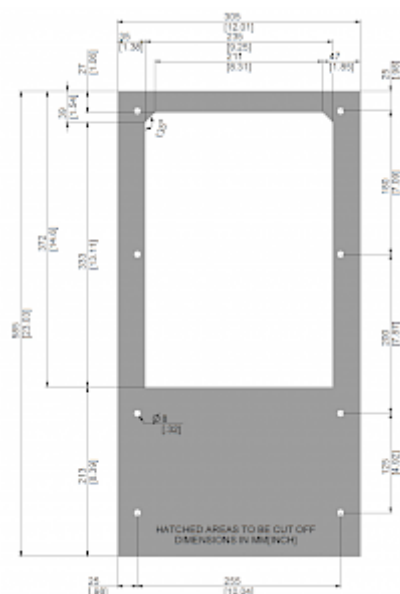

[click image to enlarge](#)