

SoliTherm[®] SlimLine

Filterless enclosure air conditioners



- Cooling capacities from 1,130 BTU up to 5,120 BTU (95F/95F)
- Operating temperature range 50°F - 122 / 131°F
- NEMA type 12, powder coated steel metal, RAL 7035
- Optimized wide-ribbed aluminum condenser
- Completely filterless, no need for any filter media
- Virtually maintenance free
- Only 4.5 inches deep and therefore currently the slimmest air conditioners on the market.
- External, recessed and horizontal (KG 4267) mounting
- Assembly parts, mounting template and condensation kit included



NEMA 4X upgrade cover



Standard 2-Year Warranty



Protection



External



Recessed



Filterless



Maintenance free




KG 4266 - 1,130 BTU

Dimensions: 20.47 x 19.63 x 4.33 inch, weight 29 lbs.

Order no.	Voltage	Nominal current	Start current
42660001	230 ~ 50/60 Hz	1.5 A	3.2 A
42661001	120 V ~ 60 Hz	3.5 A	7.1 A

Stainless steel 304 models order no. 4266X02

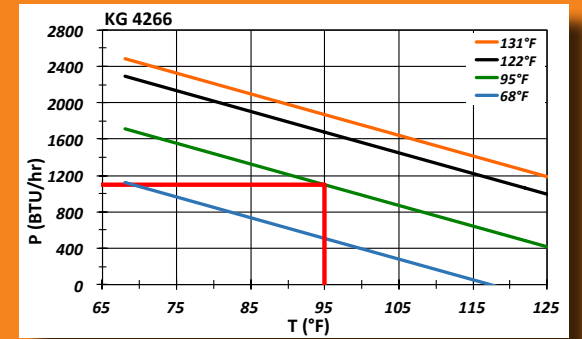


KG 4267 - 1,450 BTU

Dimensions: 13.39 x 20.47 x 4.33 inch, weight 33 lbs.

Order no.	Voltage	Nominal current	Start current
42670001	230 ~ 50/60 Hz	1.6 A	3.2 A
42671001	120 V ~ 60 Hz	3.2 A	7.4 A

(for horizontal mounting)

Stainless steel 304 models order no. 4267X02

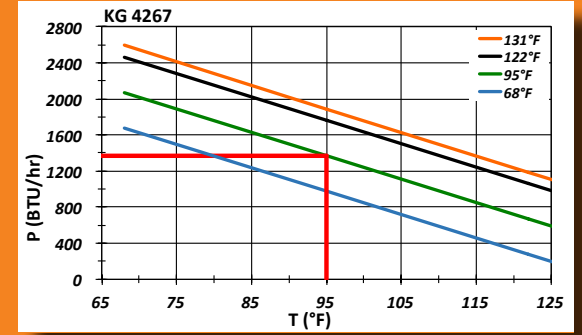


KG 4268 - 1,450 BTU

Dimensions: 20.47 x 12.60 x 4.33 inch, weight 33 lbs.

Order no.	Voltage	Nominal current	Start current
42680001	230 ~ 50/60 Hz	1.6 A	3.2 A
42681001	120 V ~ 60 Hz	3.2 A	7.4 A

Stainless steel 304 models order no. 4268X02

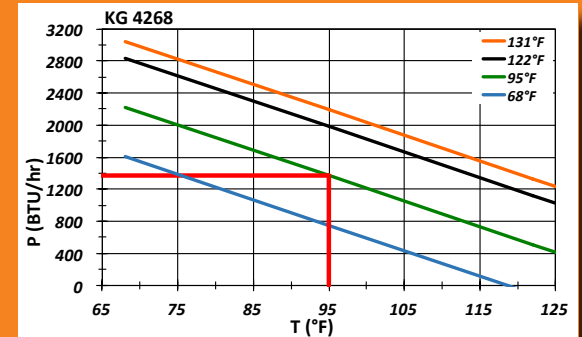


KG 4269 - 1,770 BTU

Dimensions: 23.62 x 12.60 x 4.33 inch, weight 35 lbs.

Order no.	Voltage	Nominal current	Start current
42690001	230 ~ 50/60 Hz	2.4 A	5.8 A
42691001	120 V ~ 60 Hz	4.4 A	14.6 A

Stainless steel 304 models order no. 4269X02

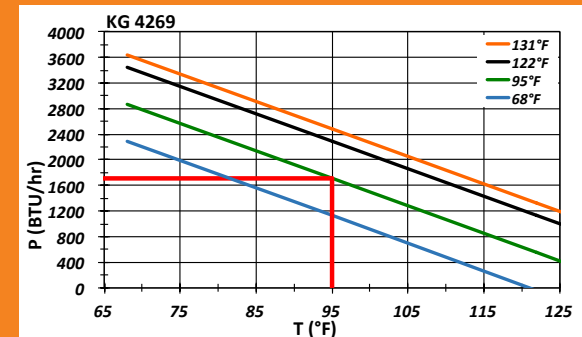


KG 4535 - 3,240 BTU

Dimensions: 10.5 x 19 x 22.2 inch, weight 99 lbs.

Order no.	Voltage	Nominal current	Start current
4535000	230 ~ 50/60 Hz	3 A	7 A
4535100	120 V ~ 60 Hz	9 A	33 A

For 19" rack mounting

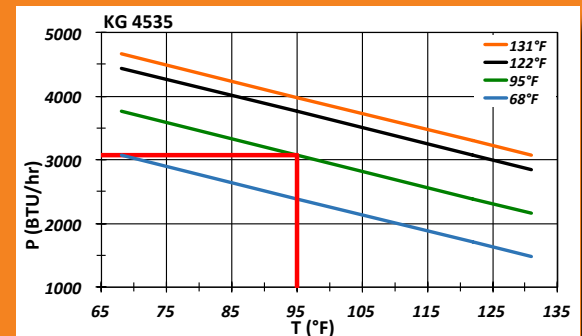


KG 4270 - 2,050 BTU

Dimensions: 31.89 x 15.55 x 5.71 inch, weight 66 lbs.

Order no.	Voltage	Nominal current	Start current
42700001	230 ~ 50/60 Hz	2.3 A	5.8 A
42701001	120 V ~ 60 Hz	5.2 A	15.2 A
42702001	400/460 V - 50/60 Hz 2~	1.5 A	4.0 A

Stainless steel 304 models order no. 4270X02

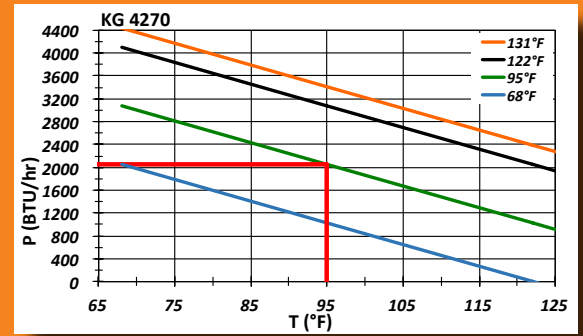


KG 4271 - 3,020 BTU

Dimensions: 38.58 x 15.55 x 5.71 inch, weight 73 lbs.

Order no.	Voltage	Nominal current	Start current
42710001	230 ~ 50/60 Hz	3.3 A	15.5 A
42711001	120 V ~ 60 Hz	7.2 A	37 A
42712001	400/460 V - 50/60 Hz 3~	1.4 A	8.2 A

Stainless steel 304 models order no. 4271X02

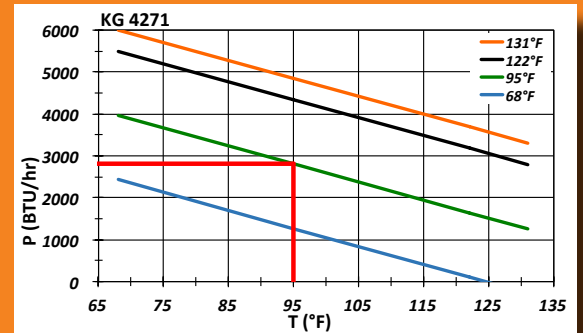


KG 4272 - 4,090 BTU

Dimensions: 49.21 x 15.55 x 5.71 inch, weight 88 lbs.

Order no.	Voltage	Nominal current	Start current
42720001	230 ~ 50/60 Hz	3.4 A	15.5 A
42721001	120 V ~ 60 Hz	8.0 A	37 A
42722001	400/460 V - 50/60 Hz 3~	1.6 A	8.2 A

Stainless steel 304 models order no. 4272X02

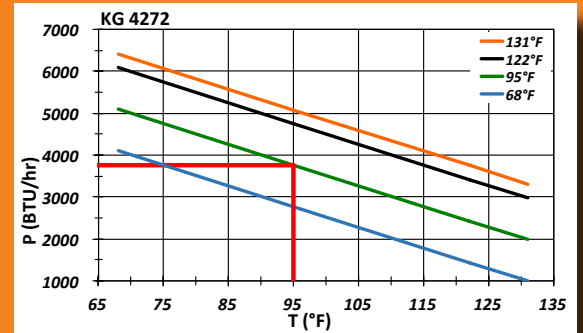

KG 4274 - 5,120 BTU

Dimensions: 61.02 x 15.55 x 5.71 inch, weight 110 lbs.

Order no.	Voltage	Nominal current	Start current
42740001	230 ~ 50/60 Hz	4.3 A	22 A
42741001	120 V ~ 60 Hz	8.8 A	37 A
42742001	400/460 V - 50/60 Hz 3~	1.8 A	13 A

Stainless steel 304 models order no. 4274X02

