

Thermoelectric cooler




Description

Order Number:	0905718422
Brand Name:	SoliTherm
Housing Material:	Stainless steel AISI 316 (V4A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE


Technical data

Cooling capacity 95F/95F:	160 W
Cooling capacity 95F/122F:	98 W
Air volume flow (system / unimpeded):	Umgebungskreislauf: 150 m ³ /h Schränkkreislauf: 150 m ³ /h
Operating temperature range:	-4°F - 158°F
UL temperature range:	-4°F - 149°F
Mounting:	Halbeinbau
Dimension H x W x D:	19 x 10 x 6.4 inch
Weight:	14.6 kg
Cut out dimensions:	358 x 215 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	0.9 A
Starting current:	1.1 A
Max. current:	2 A
Nominal power 95F95F:	190 W
Max. power:	300 W
Fuse:	4 A (T)
Connection:	Anschlusskabel

Performance graph:

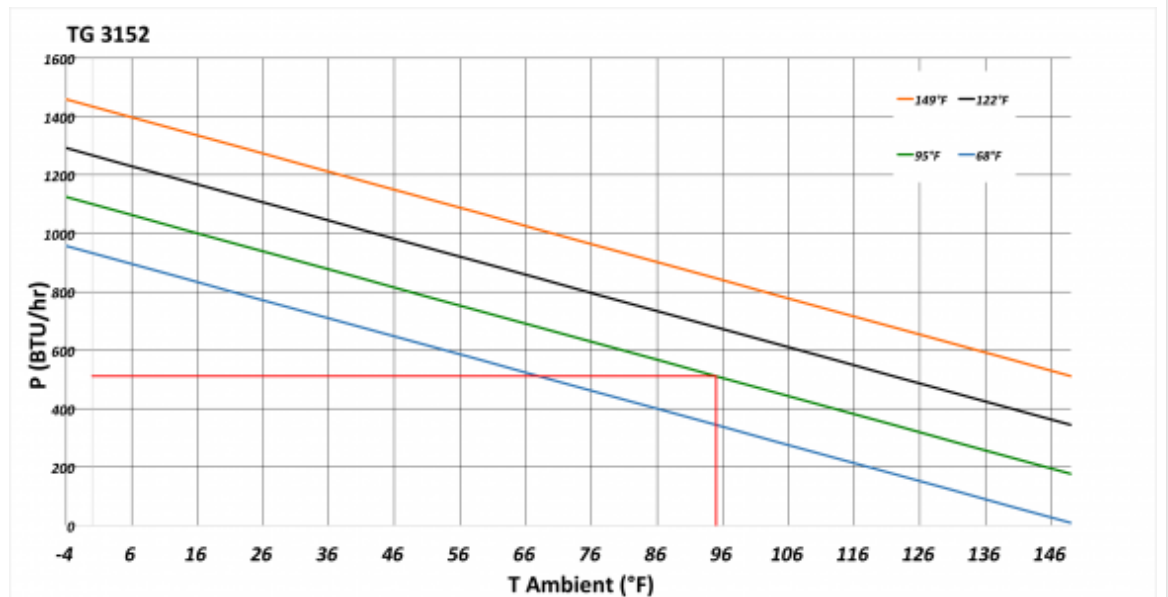

Air flow:

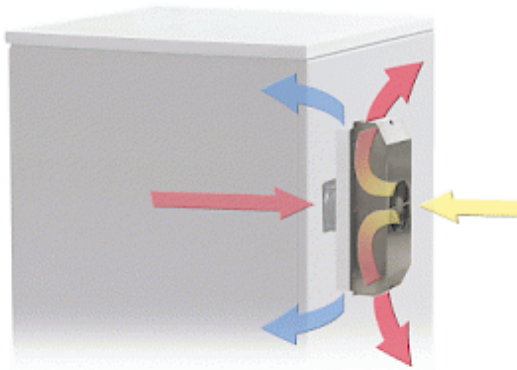

Dimensions:

