

Filter Fan



Description


Order Number:	4010D2100
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection to EN 60 529:	NEMA 12
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4010D2130
Approvals:	CE, cURus, cULus, CSA

Technical data


Air flow unimpeded IP 54:	14 cfm
Operating temperature range:	14°F - +131°F
Static pressure:	0.18 inH2O
Dimension H x W x D:	4.2 x 4.2 x 2.1 in.
Weight:	0.77 lbs
Cut out dimensions:	3.6 x 3.6 in.(+0.06)
Voltage / Frequency:	24 V DC
Rated current:	0.092 A
Power consumption:	2.2 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	0.04 - 0.08 in.
Filter class (ISO 16890):	G3 according to EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	30 dB(A)

Air flow:

Q = Air flow [m³/h]
P = Static pressure [Pa]

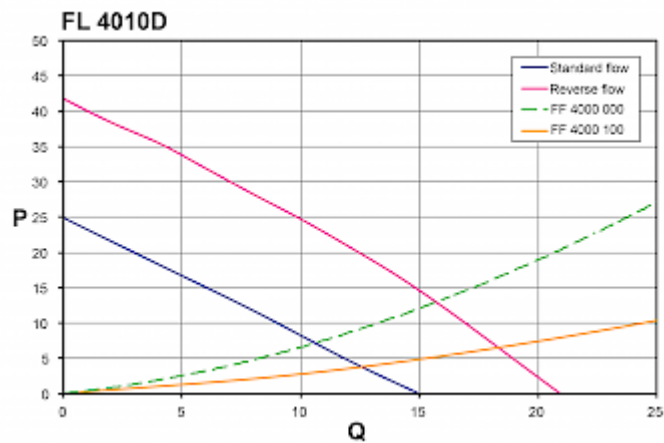

Cut out dimensions:

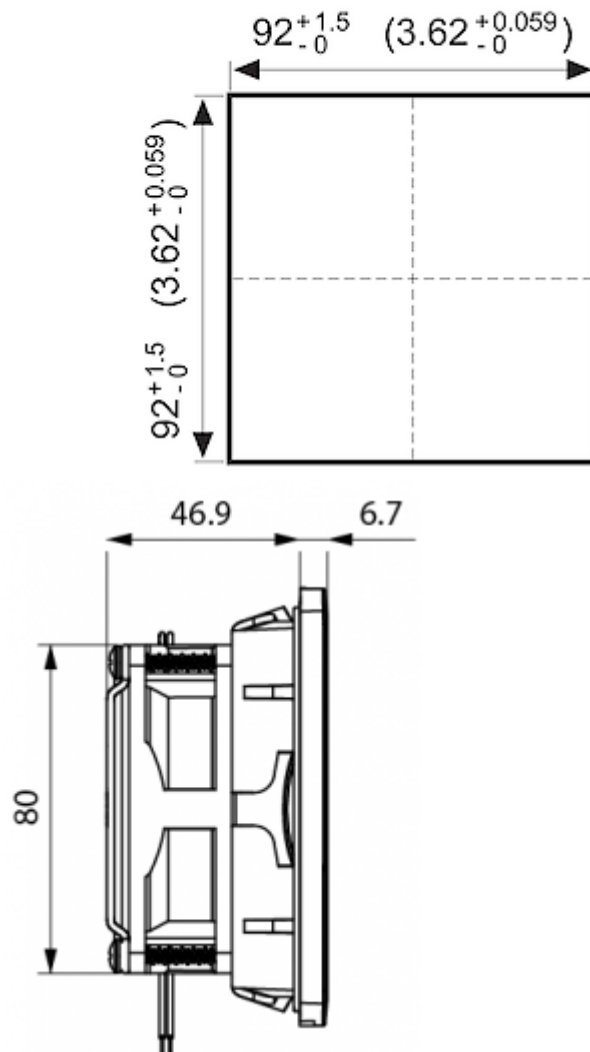

Order Information

With NEMA 3R protection part no.	4010D2130
Taric code	84145915
GTIN (EAN)	5350604100176