

Thermoelectric cooler




Description

Order Number:	6105305
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Included:	Kondensatablaufstutzen
Note:	The torque for the mounting nuts should be 4.5 Nm
Approvals:	CE, cURus


Technical data

Cooling capacity 95F/95F:	340 BTU
COP rated:	0.89
Air volume flow (system / unimpeded):	Ambient air circuit: 75 / 125 cfm Cabinet air circuit: 27 / 53 cfm
Operating temperature range:	-4°F - 149°F
UL temperature range:	-20°C - 65°C
Mounting:	External (with frame)
Dimension H x W x D:	11 x 13.8 x 6.5 inch
Weight:	24 lbs.
Cut out dimensions:	350 x 280 mm
Voltage / Frequency:	120 V, 230 V
Current 95F95F:	1.0 A @ 120 V
Starting current:	1.6 A @ 120 V 0.8 A @ 230 V
Max. current:	1.2 A @ 120 V 0.6 A @ 230 V
Max. power:	139 W
Fuse:	2 A (T) @ 120 V 1 A (T) @ 230 V
Connection:	4 pole power connector 5 pole connector for signals

Performance graph:

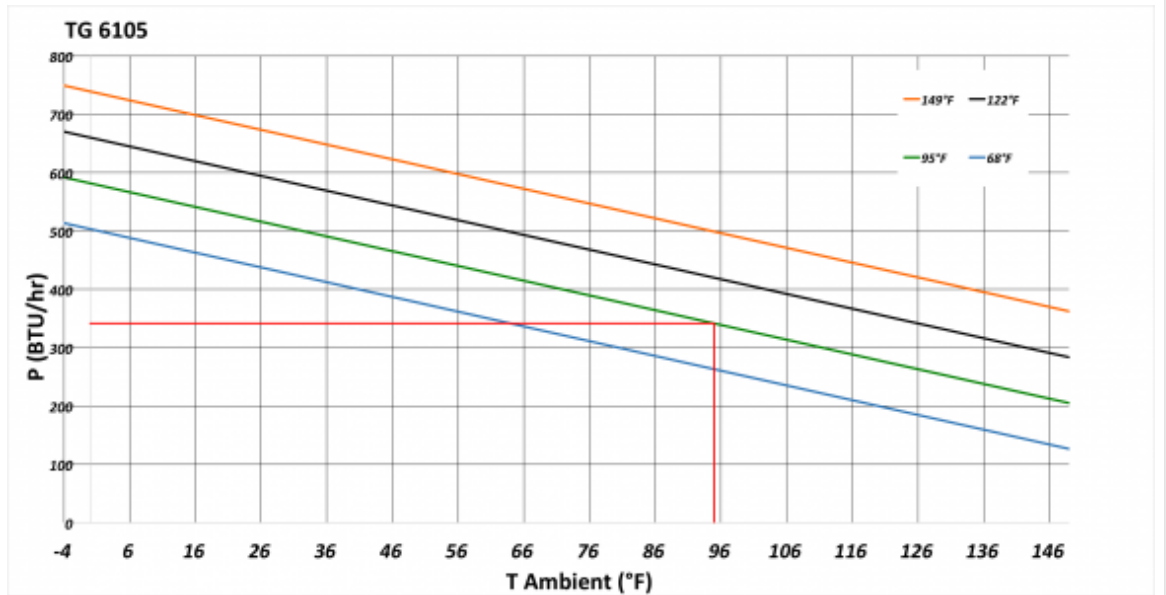

Dimensions:

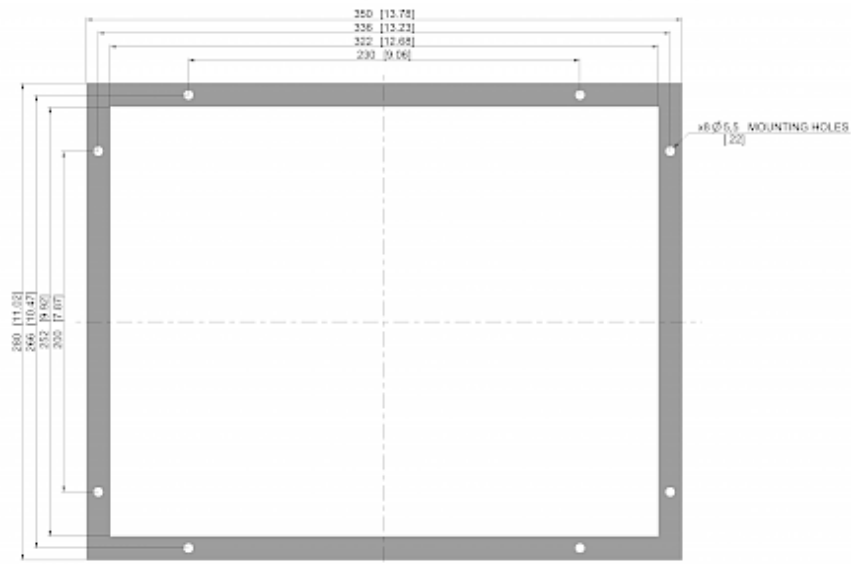

Order Information

Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.	61053054
Verpackungsmaße	314 x 436 x 183.5 mm
Bruttogewicht	13.1 kg
Taric code	84158300