

Outdoor filter fan SF 4725 - 24V



Seifert Filterlüfter werden zur optimalen Belüftung von Schaltschränken eingesetzt. Die Zuführung gefilterter kälterer Außenluft sowie die Abführung warmer Innenluft garantieren eine optimale Temperatur im Schaltschrank. Es werden 2 verschiedene Luftstromrichtungen angeboten. Blasend - in den Schaltschrank hinein blasend (Standard) und saugend - aus dem Schaltschrank heraus saugend (auf Anfrage). Der Luftstrom variiert je nach Spannung und Luftrichtung zwischen 244 und 273 m³/h.


Description

Order Number:	4725392203
Brand Name:	SOLIVENT PRO
Color:	RAL 9005
Housing Material:	PC plastic / RAL 7035
Ingress protection to EN 60 529:	IP 54
UL Typ (UL 50E):	12, 3R
Note:	IP 55 with filter O3 (see manual)
Approvals:	CE, cURus, cULus
UL File Number:	E498756


Technical data

Air flow unimpeded IP 54:	155 CFM
Air flow with exhaust filter IP 54:	108 CFM
Air flow unimpeded Type 12:	139 / 156 CFM
Operating temperature range:	-40°F - 131°F
Storage temperature range:	-40°F - 158°F
Mounting:	Wall mounted
Dimension H x W x D:	10.06 × 10.06 × 4.43 inches
Weight:	3.75 lbs.
Cut out dimensions:	8.82 x 8.82 inch
Voltage / Frequency:	24 V
Rated current:	0.89 A
Power consumption:	21.4 W
Degree of separation IP 54:	67 % - DIN 24185
Degree of separation IP 55:	85 % - DIN 24185
Wall thickness:	0.039 - 0.118 inch
Noise level:	60.5 dB (A)
Fuse:	1.5 A(T)
Connection:	Spring terminal


Air flow:

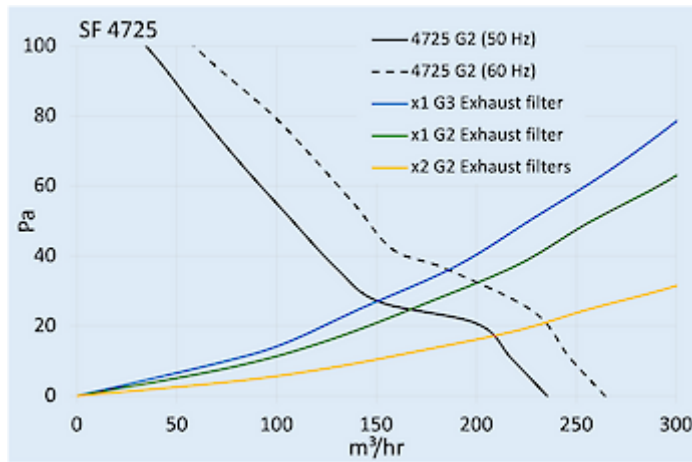

Cooling capacity:

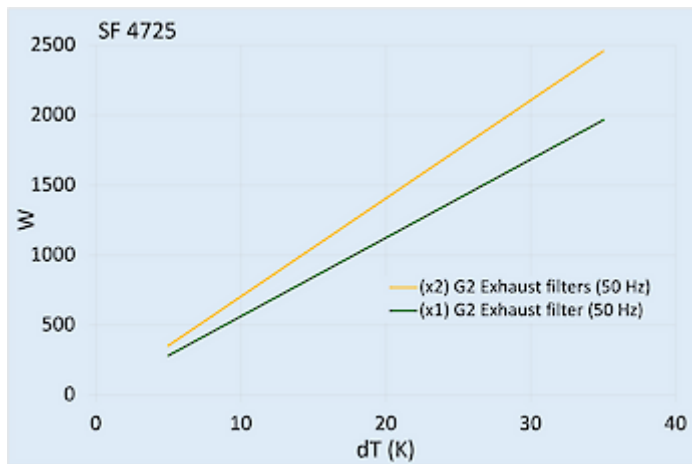

Dimensions:

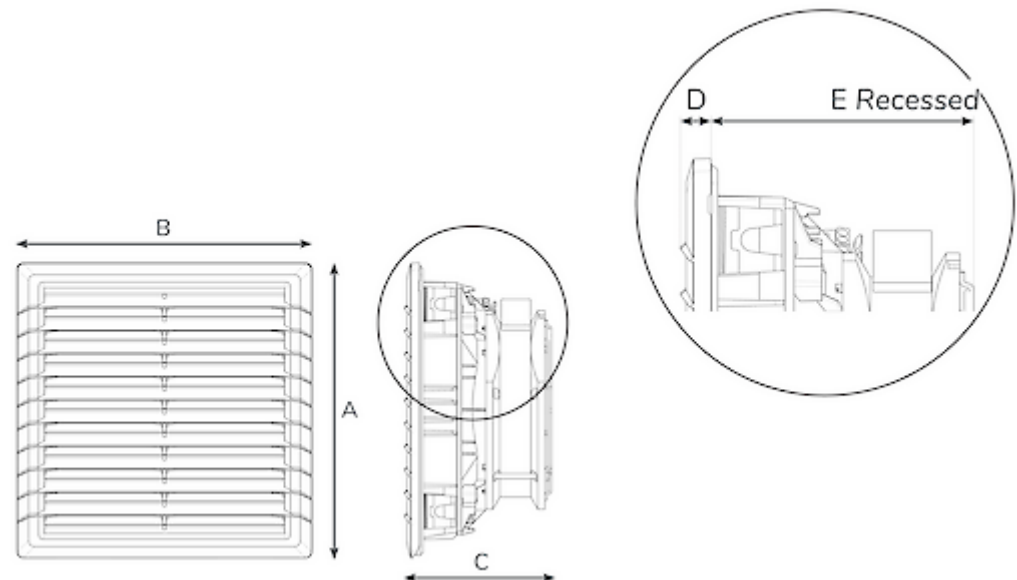

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m³/h) ²⁾	Air flow with exhaust filter (m³/h)
4725082201	IP 54		7035	B	235/264 m³/hr	167/209 m³/hr
4725082203	IP 54		9005	B	235/264 m³/hr	167/209 m³/hr
4725083201	IP 55		7035	B	220/245 m³/hr	135/165 m³/hr
4725083203	IP 55		9005	B	220/245 m³/hr	135/165 m³/hr
472508R2201	IP 54		7035	S	255/290 m³/hr	175/215 m³/hr
472508R2203	IP 54		9005	S	255/290 m³/hr	175/215 m³/hr
472508R3201	IP 55		7035	S	240/275 m³/hr	150/185 m³/hr
472508R3203	IP 55		9005	S	240/275 m³/hr	150/185 m³/hr

¹⁾ B = Blowing – from ambient into the enclosure (standard version)
S = Suction – from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz

Zolltarifnummer

84145915