

Outdoor air conditioner



Description

Order Number:	87622582
Brand Name:	COMPACT OUTDOOR
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 56 / Type 12, 3, 3R, 4X
Included:	Mit Schaltschrankheizung und Aluminium Filter
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	6.0 kW @ 50 Hz 6.2 kW @ 60 Hz
Cooling capacity 95F/122F:	4.8 kW @ 50 Hz 5.4 kW @ 60 Hz
Enclosure heater:	2.0 kW
Compressor type:	Scroll Compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	1140 g / 40.2 oz
High / low pressure:	32 / 6 bar 460 / 88 psi
Air volume flow (system / unimpeded):	Ambient: 635 / 870 cfm Enclosure: 550 / 635 cfm
Operating temperature range:	-40°C - 55°C
Mounting:	Wall mounted
Dimension H x W x D:	44.7 x 17.9 x 15.4 inch
Weight:	85 kg
Voltage / Frequency:	380-415V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V - 60 Hz 3~
Current 95F95F:	5.9 A @ 50 Hz 6.2 A @ 60 Hz
Starting current:	57 / 44 A
Max. current:	9.8 A
Nominal power 95F95F:	3.0 kW @ 50 Hz 3.8 kW @ 60 Hz
Max. power:	6.3 kW
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	6.4 A
Full load current fans:	1.3 A

Connection:

4 pole terminal block for power
5 pole terminal block for signals,
3 pole connector for RS 485 interface

Dimensions:

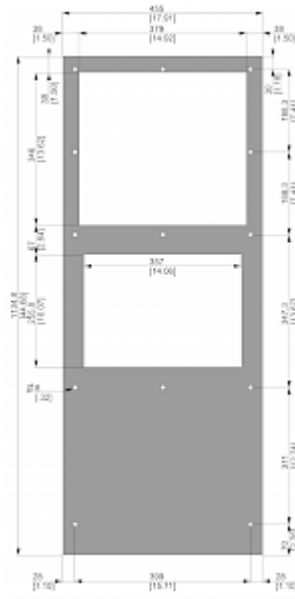

Order Information

In Edelstahl 316 (V4A) Nr.	87622584
Verpackungsmaße	1215 x 555 x 549.5 mm
Bruttogewicht	96.5 Kg
Taric code	84158200