

Enclosure air conditioner



Description

Order Number:	85209576
Brand Name:	SLIMLINE PRO
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	Type 3, 3R, 12, 4
Sk Hinweis:	Packing bag without cable grommets and covering plate. Customer will make a cable relief with the existing fixing point, but does not use the cover / grommet
Approvals:	CE, cURus, cULus

Technical data

Cooling capacity 95F/95F:	4625 BTU @ 50 Hz 4625 BTU @ 60 Hz
Cooling capacity 95F/122F:	5800 BTU @ 50 Hz 5980 BTU @ 60 Hz
EER 95F95F:	2.0
Compressor type:	Rotary piston
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	377 g / 13.3 oz
High / low pressure:	30 / 6 bar 435 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 400 / 706 cfm Cabinet air circuit: 294 / 500 cfm
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 140°F
Mounting:	Wall mounted / recessed
Dimension H x W x D:	1550 x 455x 292 mm
Weight:	105.4 lbs
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	460 V / 60Hz 3~
Current 95F95F:	2 A @ 50 Hz 2 A @ 60 Hz
Starting current:	8 A
Max. current:	2.5 A
Nominal power 95F95F:	1030 W @ 50 Hz 1300 W @ 60 Hz
Max. power:	1720 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	1.3 A

Full load current fans:

1.3 A


Connection:

4 pole terminal block for power


5 pole terminal block for signals

3 pole terminal block for RS 485

Performance graph:

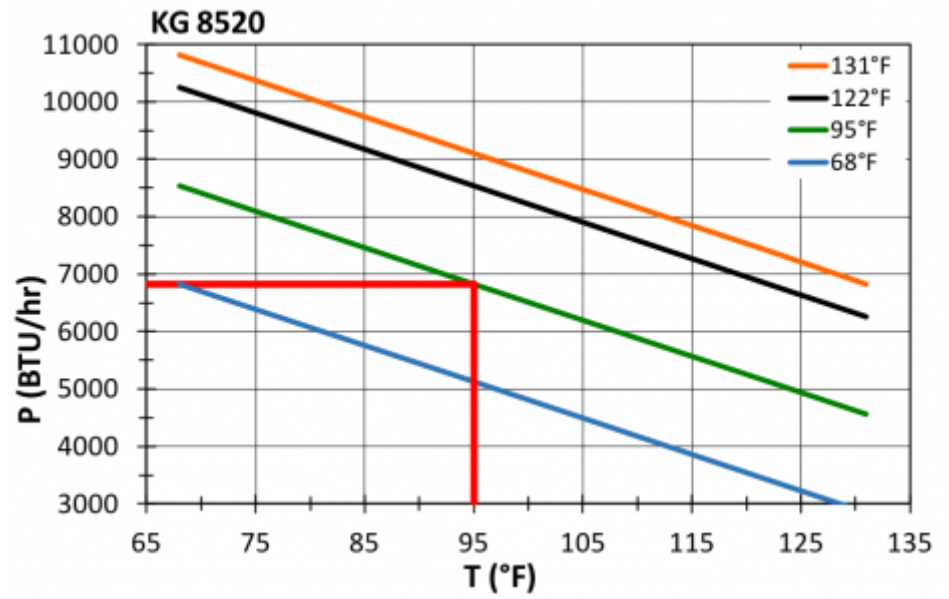

Dimensions:

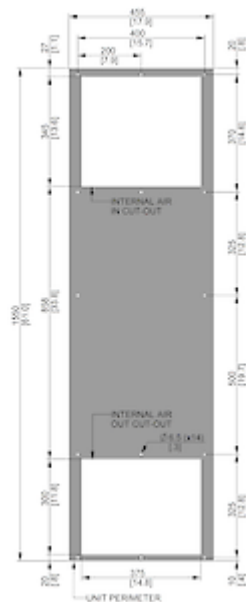

Order Information

Box dimensions	1442 x 495 x 242 mm
-----------------------	---------------------

Gross weight	54 Kg
---------------------	-------

Taric code	84158200
-------------------	----------