

Filterless enclosure air conditioner




Description

| | |
|----------------------------|---------------------------|
| Order Number: | 42700001 |
| Brand Name: | SLIMLINE |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | TYPE 12 |
| Approvals: | CE / cURus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 2050 BTU |
| Cooling capacity 95F/122F: | 1025 BTU |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 265 g / 9.3 oz |
| High / low pressure: | 37 / 9.6 bar 406 / 140 psig |
| Operating temperature range: | 50°F - 122°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 200 / 383 cfm Cabinet air circuit: 100 / 324 cfm |
| Mounting: | Wall mounted / Recessed |
| Dimension H x W x D: | 31.89 x 15.55 x 5.71 in. |
| Weight: | 66 lbs. |
| Cut out dimensions: | 31.14 x 14.80 in. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 2.3 A @ 50 Hz 2.5 A @ 60 Hz |
| Starting current: | 5.8 A |
| Max. current: | 3 A |
| Nominal power 95F95F: | 440 W @ 50 Hz 480 W @ 60 Hz |
| Max. power: | 575 W |
| Fuse: | 6 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 5.8 A |
| Full load current fans: | 3 A |
| Connection: | Connection terminal block |


Performance graph:

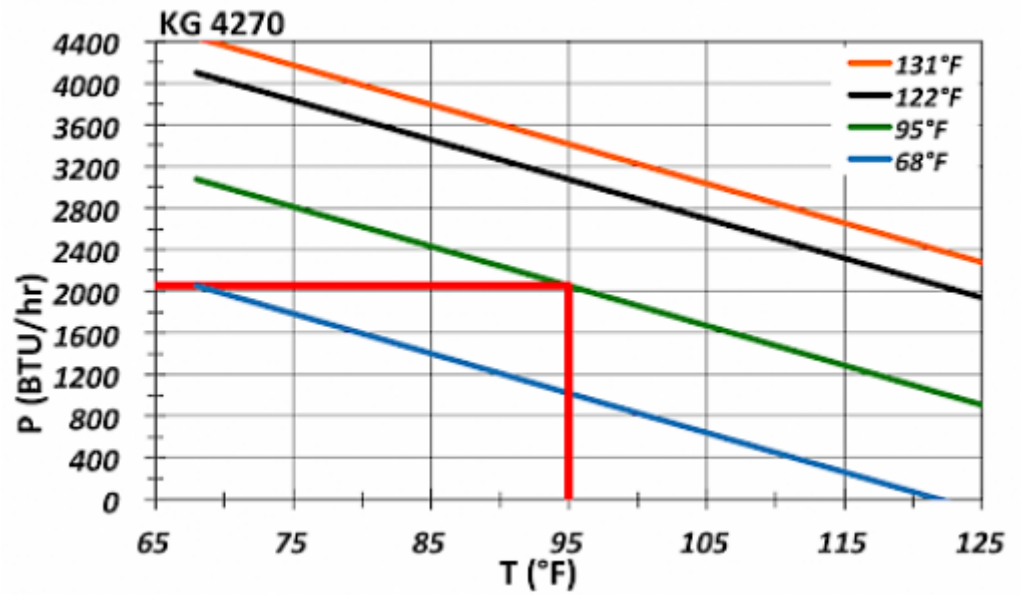

Air flow:

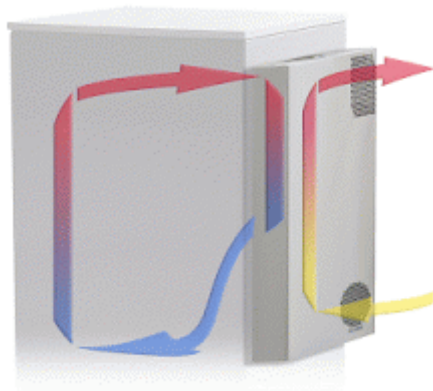

Cut out dimensions:

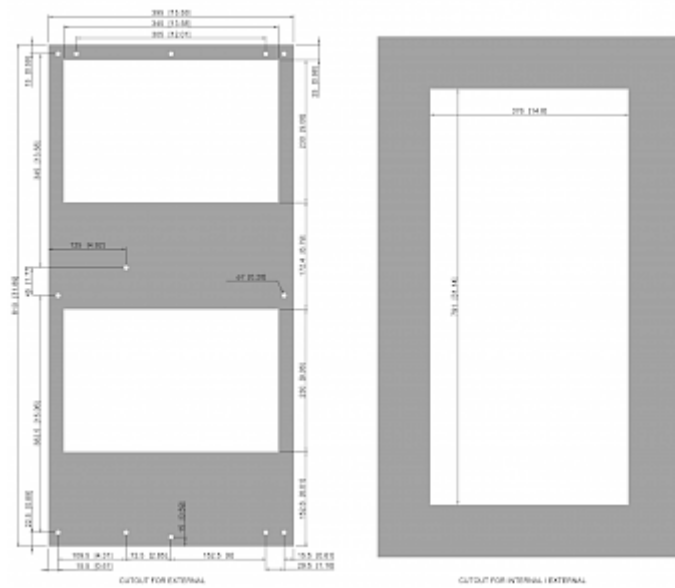

Order Information

| | |
|-----------------------|----------------------|
| Box dimensions | 904.5 x 496 x 204 mm |
| Gross weight | 34.5 kg |
| Taric code | 84158200 |
| GTIN (EAN) | 5350604370746 |