

## Outdoor air conditioner




## Description

<b>Order Number:</b>	573110001
<b>Brand Name:</b>	Compact Outdoor
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	TYPE 12, 3, 3R, 4
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Number:</b>	cURus (SA32278), cULus (E498756)


## Technical data

<b>Cooling capacity 95F/95F:</b>	10235 BTU
<b>Cooling capacity 95F/122F:</b>	8565 BTU
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	900 g / 31.7 oz
<b>High / low pressure:</b>	29 / 6 bar 425 / 88 psig
<b>Operating temperature range:</b>	-40°F - 131°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 450 / 706 cfm Cabinet air circuit: 560 / 706 cfm
<b>Mounting:</b>	Wall mounted
<b>Dimension H x W x D:</b>	61 x 18 x 14 inch
<b>Weight:</b>	172 lbs.
<b>Voltage / Frequency:</b>	120 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	115 V ~ 60 Hz
<b>Current 95F95F:</b>	15.3 A
<b>Starting current:</b>	49 A
<b>Max. current:</b>	18.4 A
<b>Nominal power 95F95F:</b>	1,37 kW
<b>Max. power:</b>	1,65 kW
<b>Fuse:</b>	20 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	4 pole terminal block for power 5 pole terminal block for signals 3 pole terminal block for RS 485

**Performance graph:**

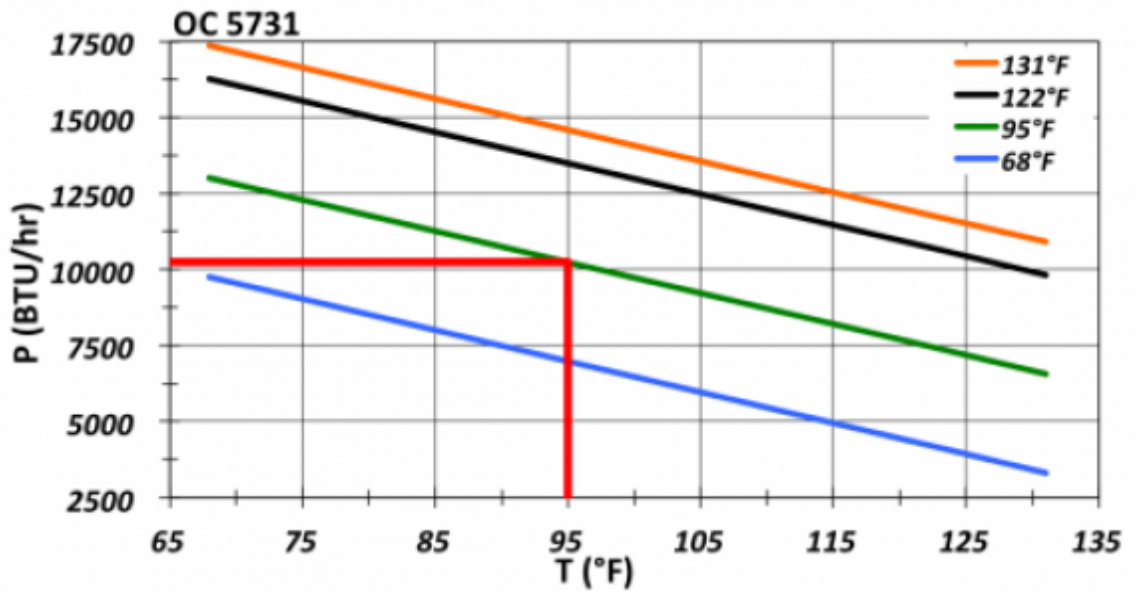

**Cut out dimensions:**

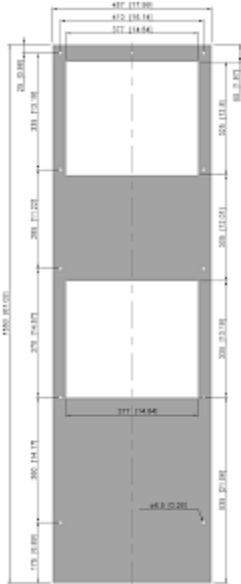

## Order Information

<b>Ohne 1500 W Schaltschrankheizung Bestell Nr.</b>	573110001
<b>With 1,500 W enclosure heater part no.</b>	573111001
<b>Box dimensions</b>	1,590 x 503 x 395 mm
<b>Gross weight</b>	82 kg
<b>Taric code</b>	84158200