

Enclosure air conditioner type 4X




Description

Order Number:	57051162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Sk Hinweis:	With cabinet heater With metal mash filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	1945 BTU
Cooling capacity 95F/122F:	1520 BTU @ 50 Hz 1670 BTU @ 60 Hz
Enclosure heater:	400 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	133 g / 4.7 oz
High / low pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 185 / 500 cfm Cabinet air circuit: 97 / 147 cfm
Mounting:	Wall mounted
Dimension H x W x D:	32.68 x 12 x 10.63 inch
Weight:	66 lbs.
Cut out dimensions:	10.43 x 7.09 inch 10.43 x 6.3 inch
Voltage / Frequency:	120 V ~ 50/60 Hz
UL Voltage / Frequency:	115 V ~ 60 Hz
Current 95F95F:	4.9 A @ 50 Hz 4.8 A @ 60 Hz
Starting current:	20 A
Max. current:	5.4 A
Nominal power 95F95F:	445 W @ 50 Hz 475 W @ 60 Hz
Max. power:	575 W
Fuse:	8 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

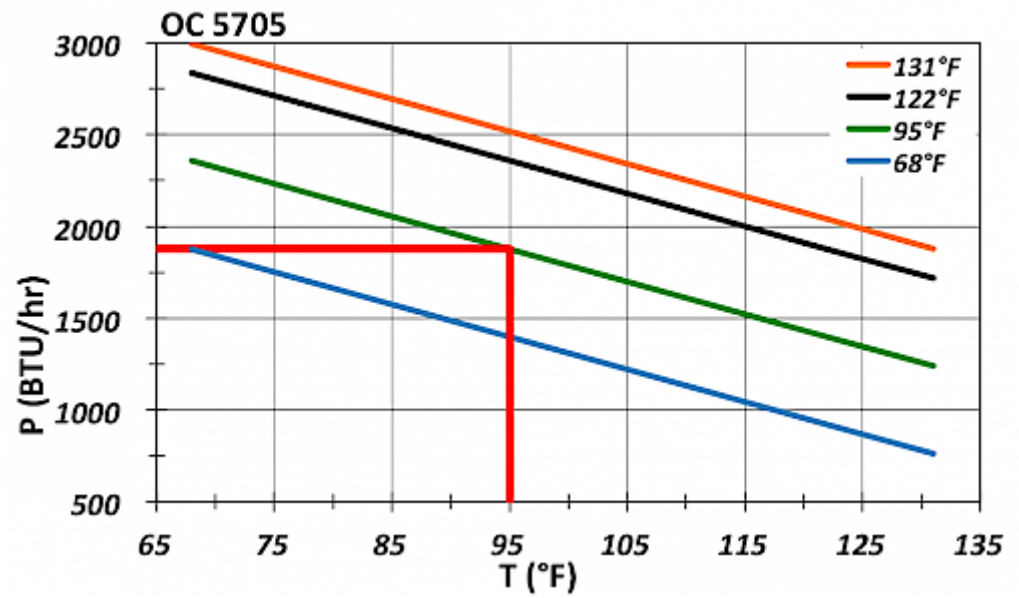

Cut out dimensions:



Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57051062
With stainless steel AISI 316 (V4A)	57051064
In Edelstahl 304 (V2A) mit 400 W Schaltschrankheizung Bestell Nr.	57051162
In Edelstahl 316 (V4A) mit 400 W Schaltschrankheizung Bestell Nr.	57051164
Verpackungsmaße	870 x 348 x 310 mm
Bruttogewicht	34 kg
Zolltarifnummer	84158200