

Enclosure air conditioner type 4X




Description

| | |
|----------------------------|----------------------------------|
| Order Number: | 57081162 |
| Brand Name: | Compact Outdoor |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| Ingress protection: | IP 56 / Type 12, 3, 3R, 4, 4X |
| Approvals: | CE, cURus, cULus |
| UL File Number: | cURus (SA32278), cULus (E498756) |


Technical data

| | |
|--|---|
| Cooling capacity 95F/95F: | 2830 BTU |
| Cooling capacity 95F/122F: | 2220 BTU @ 50 Hz 2370 BTU @ 60 Hz |
| Enclosure heater: | 400 W |
| Compressor type: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 234 g / 8.3 oz |
| High / low pressure: | 457 / 88 psig |
| Operating temperature range: | -40°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 185 / 500 cfm Cabinet air circuit: 97 / 147 cfm |
| Mounting: | Wall mounted |
| Dimension H x W x D: | 32.68 x 12 x 10.63 inch |
| Weight: | 70 lbs. |
| Cut out dimensions: | 10.43 x 7.09, 10.43 x 6.3 inch |
| Voltage / Frequency: | 120 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 115 V ~ 60 Hz |
| Current 95F95F: | 5.4 A @ 50 Hz 5.2 A @ 60 Hz |
| Starting current: | 20 A |
| Max. current: | 6.2 A |
| Nominal power 95F95F: | 495 W @ 50 Hz 545 W @ 60 Hz |
| Max. power: | 670 W |
| Fuse: | 10 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |

Performance graph:

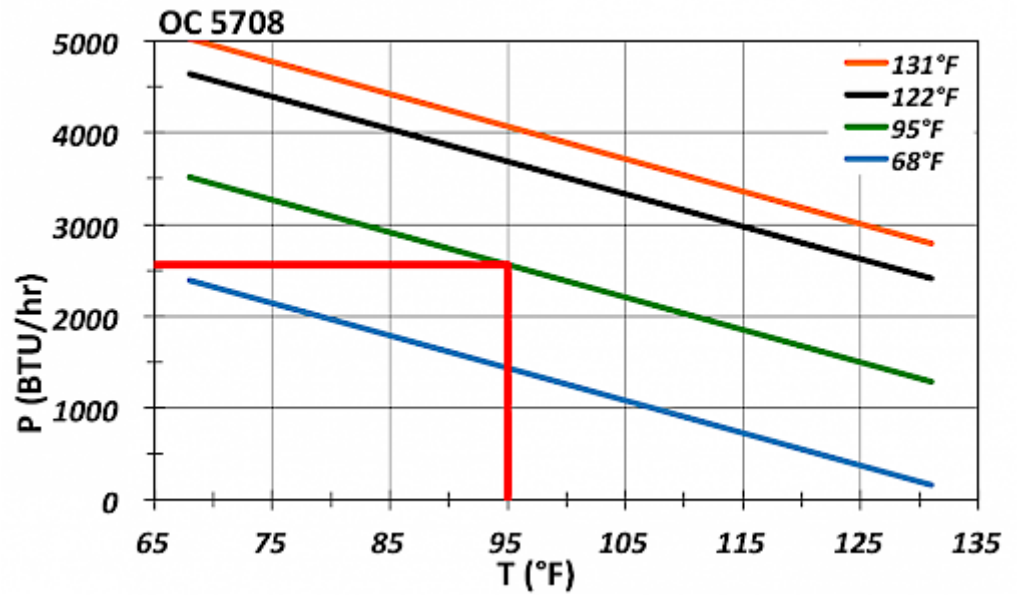

Cut out dimensions:

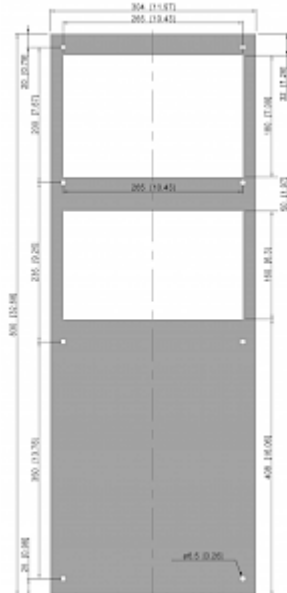

Order Information

| | |
|--|--------------------|
| In Edelstahl 304 (V2A) Bestell Nr. | 57081062 |
| With stainless steel AISI 316 (V4A) | 57081064 |
| In Edelstahl 304 (V2A) mit 400 W Schaltschrankheizung Bestell Nr. | 57081162 |
| In Edelstahl 316 (V4A) mit 400 W Schaltschrankheizung Bestell Nr. | 57081164 |
| Verpackungsmaße | 870 x 348 x 310 mm |
| Bruttogewicht | 34 kg |
| Zolltarifnummer | 84158200 |