

Enclosure air conditioner type 4X




Description

Order Number:	57082162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	2830 BTU
Cooling capacity 95F/122F:	2220 BTU @ 50 Hz 2370 BTU @ 60 Hz
Enclosure heater:	400 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	234 g / 8.3 oz
High / low pressure:	457 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 185 / 500 cfm Cabinet air circuit: 97 / 147 cfm
Mounting:	Wall mounted
Dimension H x W x D:	32.68 x 12 x 10.63 inch
Weight:	80 lbs.
Cut out dimensions:	10.43 x 7.09, 10.43 x 6.3 inch
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current 95F95F:	1.6 A @ 50 Hz 1.4 A @ 60 Hz
Starting current:	6 A
Max. current:	1.6 A
Nominal power 95F95F:	495 W @ 50 Hz 545 W @ 60 Hz
Max. power:	670 W
Fuse:	2 x 3 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

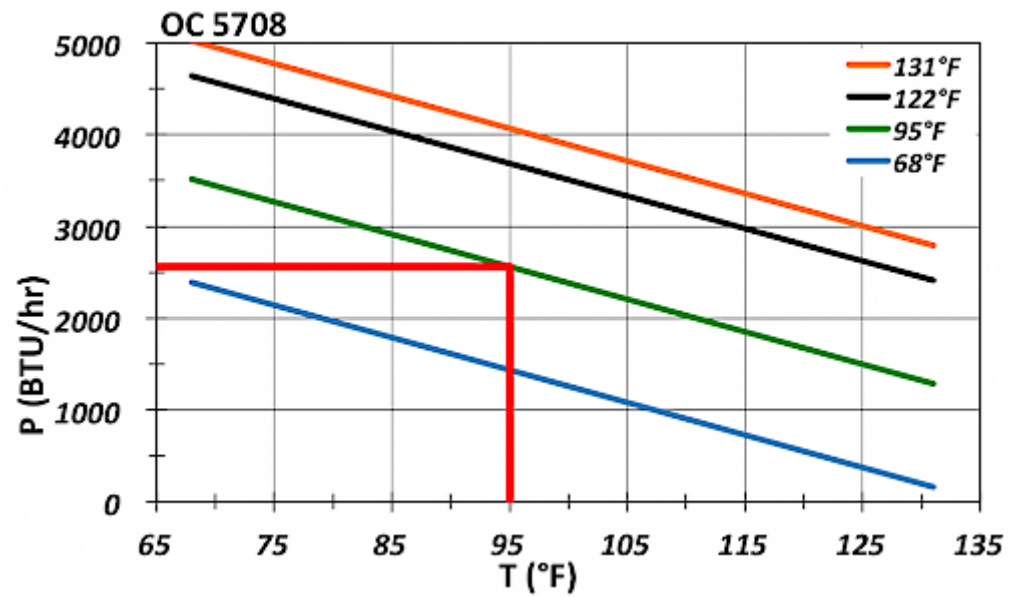

Cut out dimensions:



Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57082062
With stainless steel AISI 316 (V4A)	57082064
In Edelstahl 304 (V2A) mit 400 W Schaltschrankheizung Bestell Nr.	57082162
In Edelstahl 316 (V4A) mit 400 W Schaltschrankheizung Bestell Nr.	57082164
Verpackungsmaße	870 x 348 x 310 mm
Bruttogewicht	37 kg
Zolltarifnummer	84158200