

Enclosure air conditioner type 4X




Description

Order Number:	57150162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical data

Cooling capacity 95F/95F:	5120 BTU
Cooling capacity 95F/122F:	4370 BTU
Enclosure heater:	1000 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	400 g / 14.1 oz
High / low pressure:	26 / 6 bar 383 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 385 / 706 cfm Cabinet air circuit: 235 / 324 cfm
Mounting:	Wall mounted
Dimension H x W x D:	45.2 x 15.5 x 10.6 inch
Weight:	92 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	5.4 A @ 50 Hz 5.4 A @ 60 Hz
Starting current:	16 A
Max. current:	6.8 A / 7.1 A
Nominal power 95F95F:	1.07 kW
Max. power:	1.30 kW
Fuse:	12 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

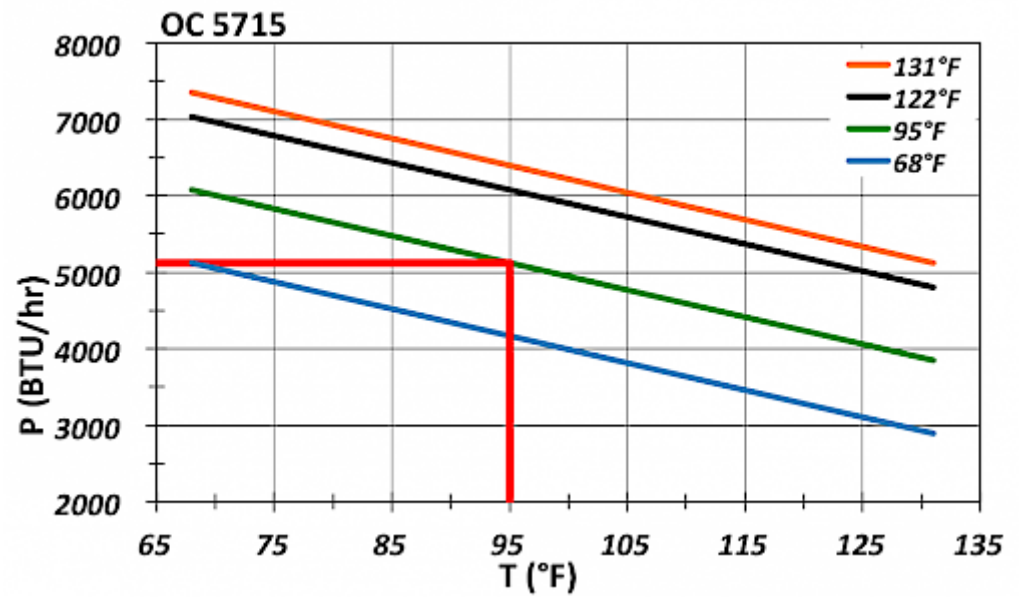

Cut out dimensions:

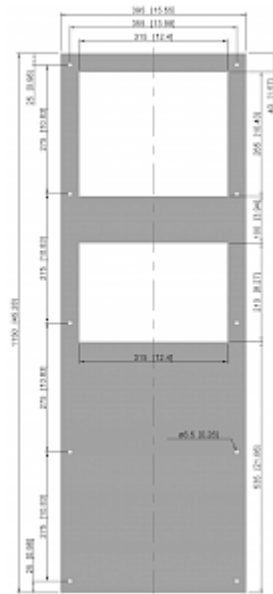

Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57150062
With stainless steel AISI 316 (V4A)	57150064
In Edelstahl 304 (V2A) mit 1000 W Schaltschrankheizung Best. Nr.	57150162
In Edelstahl 316 (V4A) mit 1000 W Schaltschrankheizung Best. Nr.	57150164
Verpackungsmaße	1,190 x 443 x 310 mm
Bruttogewicht	45 kg
Zolltarifnummer	84158200