

Enclosure air conditioner type 4X





Description

Order Number:	57201162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	6825 BTU
Cooling capacity 95F/122F:	5460 BTU @ 50 Hz 5460 BTU @ 60 Hz
Enclosure heater:	1000 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	460 g / 16.2 oz
High / low pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 385 / 706 cfm Cabinet air circuit: 235 / 500 cfm
Mounting:	Wall mounted
Dimension H x W x D:	45.2 x 15.5 x 10.6 inch
Weight:	115 lbs.
Voltage / Frequency:	120 V ~ 50/60 Hz
UL Voltage / Frequency:	115 V ~ 60 Hz
Current 95F95F:	14.4 A
Starting current:	32 A
Max. current:	17.2 A
Nominal power 95F95F:	1.61 kW
Max. power:	1.93 kW
Fuse:	28 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

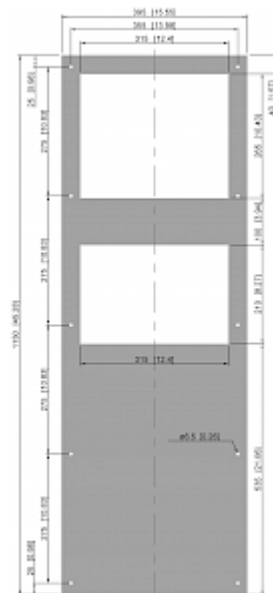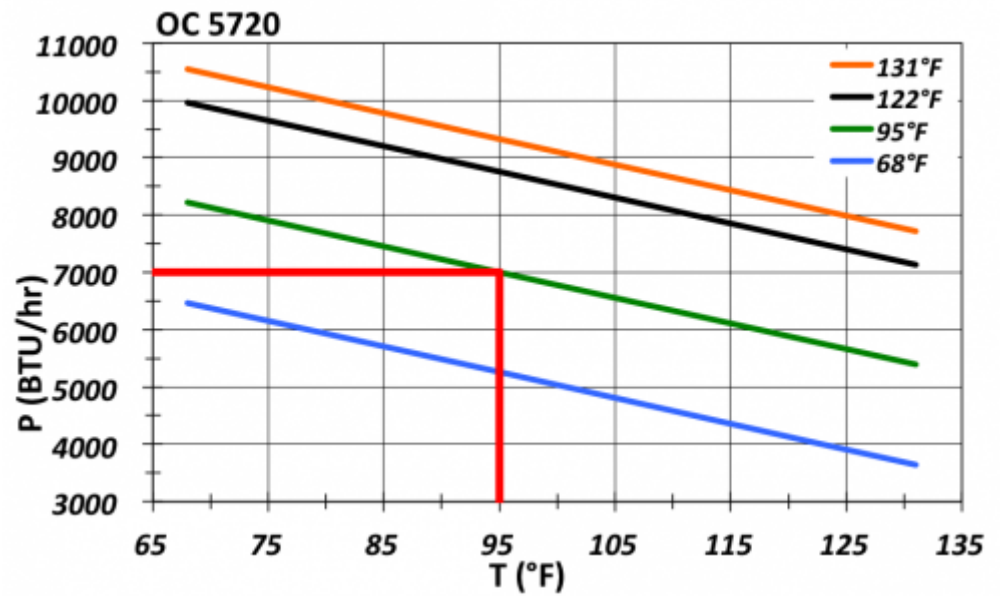

Order Information

In Edelstahl 304 (V2A) Best. Nr.	57201062
With stainless steel AISI 316 (V4A)	57201064
In Edelstahl 304 (V2A) mit 1000 W Schaltschrankheizung Best. Nr.	57201162
In Edelstahl 316 (V4A) mit 1000 W Schaltschrankheizung Best. Nr.	57201164
Verpackungsmaße	1,190 x 443 x 310 mm
Bruttogewicht	55 kg
Zolltarifnummer	84158200