

Enclosure air conditioner type 4X




Description

Order Number:	57260162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical data

Cooling capacity 95F/95F:	8530 BTU @ 50 Hz 8530 BTU @ 60 Hz
Cooling capacity 95F/122F:	6720 BTU @ 50 Hz 6960 BTU @ 60 Hz
Enclosure heater:	1,500 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	950 g / 33.5 oz
High / low pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 450 / 706 cfm Cabinet air circuit: 560 / 706 cfm
Mounting:	Wall mounted
Dimension H x W x D:	61 x 18 x 14 inch
Weight:	172 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	4.6 A @ 50 Hz 5.3 A @ 60 Hz
Starting current:	22.5 A
Max. current:	5.8 / 7.1 A
Nominal power 95F95F:	1,03 kW @ 50 Hz 1,16 kW @ 60 Hz
Max. power:	1,26 kW @ 50 Hz 1,61 kW @ 60 Hz
Fuse:	16 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

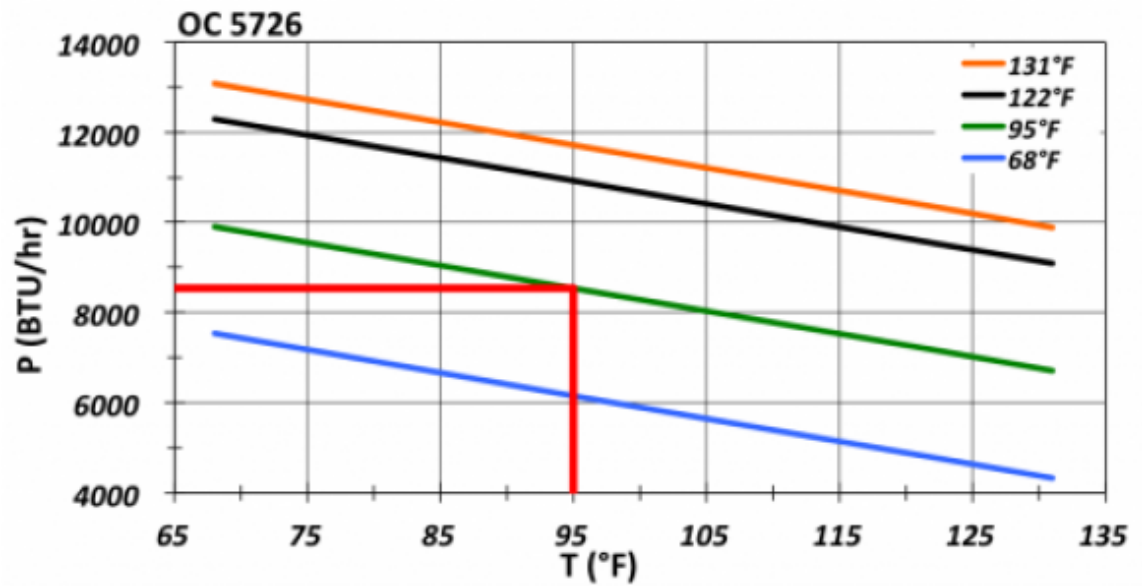

Cut out dimensions:

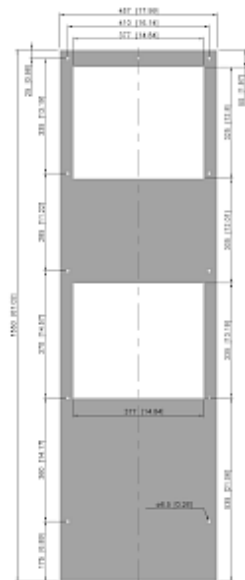

Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57260062
In Edelstahl 316 (V4A) Bestell Nr.	57260064
In Edelstahl 304 (V2A) mit 1500 W Schaltschrankheizung Best. Nr.	57260162
In Edelstahl 316 (V4A) mit 1500 W Schaltschrankheizung Best. Nr.	57260164
Verpackungsmaße	1,590 x 503 x 395 mm
Bruttogewicht	82 kg
Zolltarifnummer	84158200