

Enclosure air conditioner type 4X




Description


Order Number:	57410162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	13650 BTU @ 50 Hz 13650 @ 60 Hz
Cooling capacity 95F/122F:	10850 BTU @ 50 Hz 11465 BTU @ 60 Hz
Enclosure heater:	2,000 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	975 g / 34.4 oz
High / low pressure:	27.7 / 6 bar 406 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 583 / 883 cfm Cabinet air circuit: 560 / 706 cfm
Mounting:	Wall mounted
Dimension H x W x D:	61 x 18 x 14 inch
Weight:	181 lbs.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	8.9 A @ 50 Hz 10.2 A @ 60 Hz
Starting current:	50 A
Max. current:	13.7 A
Nominal power 95F95F:	2.0 kW @ 50 Hz 2.5 kW @ 60 Hz
Max. power:	2,40 kW @ 50 Hz 3,27 kW @ 60 Hz
Fuse:	20 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

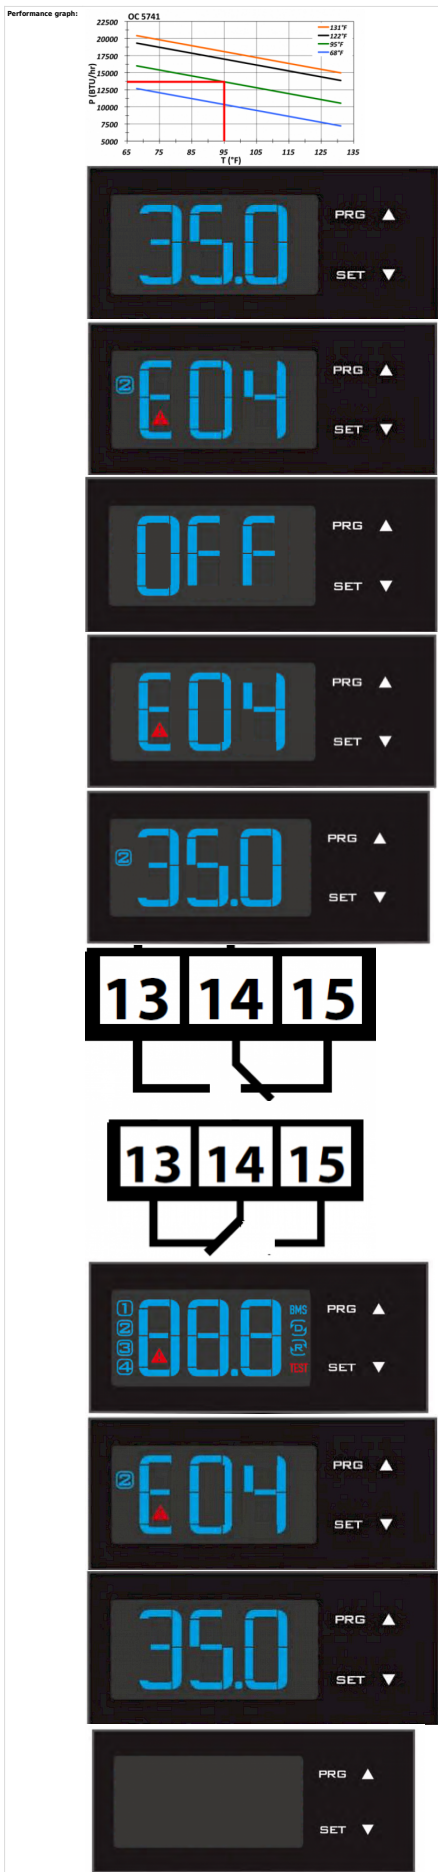

Cut out dimensions:



Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57410062
In Edelstahl 316 (V4A) Bestell Nr.	57410064
In Edelstahl 304 (V2A) mit 2000 W Schaltschrankheizung Best. Nr.	57410162
In Edelstahl 316 (V4A) mit 2000 W Schaltschrankheizung Best. Nr.	57410164
Verpackungsmaße	1,590 x 503 x 395 mm
Bruttogewicht	86 kg
Zolltarifnummer	84158200