

Enclosure air conditioner type 4X




Description

Order Number:	57092162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	2900 BTU @ 50 Hz 3000 BTU @ 60 Hz
Cooling capacity 95F/122F:	2080 BTU @ 50 Hz 2250 BTU @ 60 Hz
Enclosure heater:	400 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
High / low pressure:	30 / 6.1 bar 435 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 241 / 500 cfm Cabinet air circuit: 118 / 147 cfm
Mounting:	Wall mounted
Dimension H x W x D:	32.7 x 12 x 10.6 inch
Cut out dimensions:	10.43 x 7.09, 10.43 x 6.3 inch
Fuse:	10 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

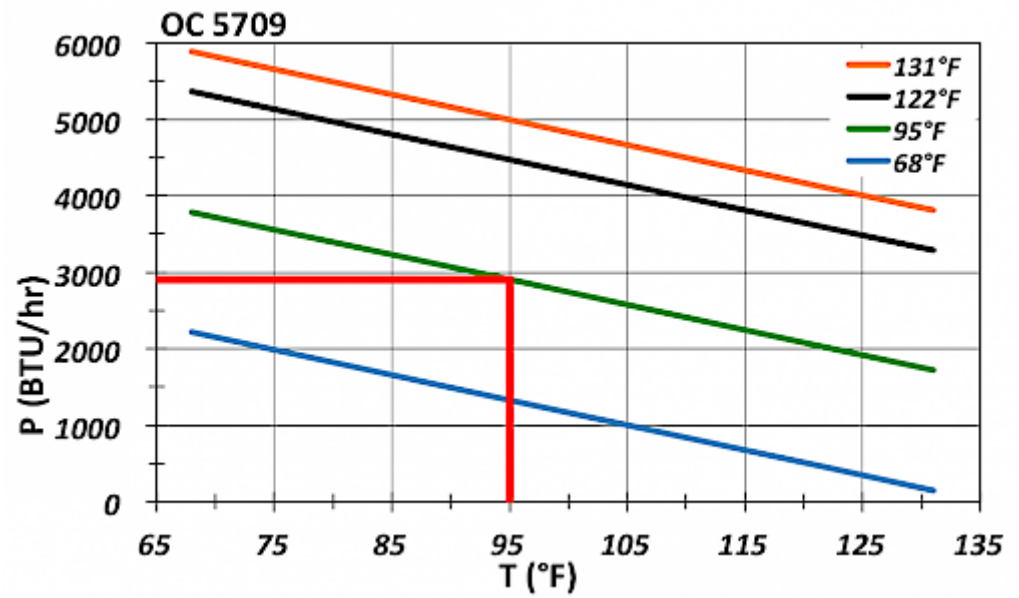

Cut out dimensions:



Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57092062
With stainless steel AISI 316 (V4A)	57092064
In Edelstahl 304 (V2A) mit 400 W Schaltschrankheizung Bestell Nr.	57092162
In Edelstahl 316 (V4A) mit 400 W Schaltschrankheizung Bestell Nr.	57092164
Verpackungsmaße	870 x 348 x 310 mm
Bruttogewicht	39 kg
Zolltarifnummer	84158200