


Enclosure air conditioner KG 4310-400V Recessed



Product Features

Brand Name:	SoliTherm ComPact
Order Number:	43102081
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	Type 12
Approvals:	CE, cURus, cULus
UL File Nummer:	cURus (SA32278), cULus (E498756)
Accessories:	<p>Fibre filter media_</p> <p>Filter holder</p>
Taric Code:	84158200




Technical data KG 4310-400V Recessed

Cooling capacity 95F/95F:	3680 BTU
Cooling capacity 95F/122F:	2540 BTU
Compressor:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	180 g / 6.4 oz
High / low pressure:	29.5 / 6 bar 425 / 88 psig
Temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 240 / 500 cfm Cabinet air circuit: 175 / 324 cfm
Mounting:	Recessed
Dimension H x W x D:	28 x 14.6 x 10.2 inch
Weight:	79 lbs.
Cut out dimensions:	12.4 x 25.7 inch
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
Nominal current:	1.8 A @ 50 Hz 2.0 A @ 60 Hz
Starting current:	5.1 A
Max. current:	2.6 A
Nominal power:	700 W
Max. power:	900 W
Fuse:	2 x 3.6 A (T)
Connection:	Connection terminal block


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Enclosure air conditioners - ComPact Line](#)

Performance Graph:

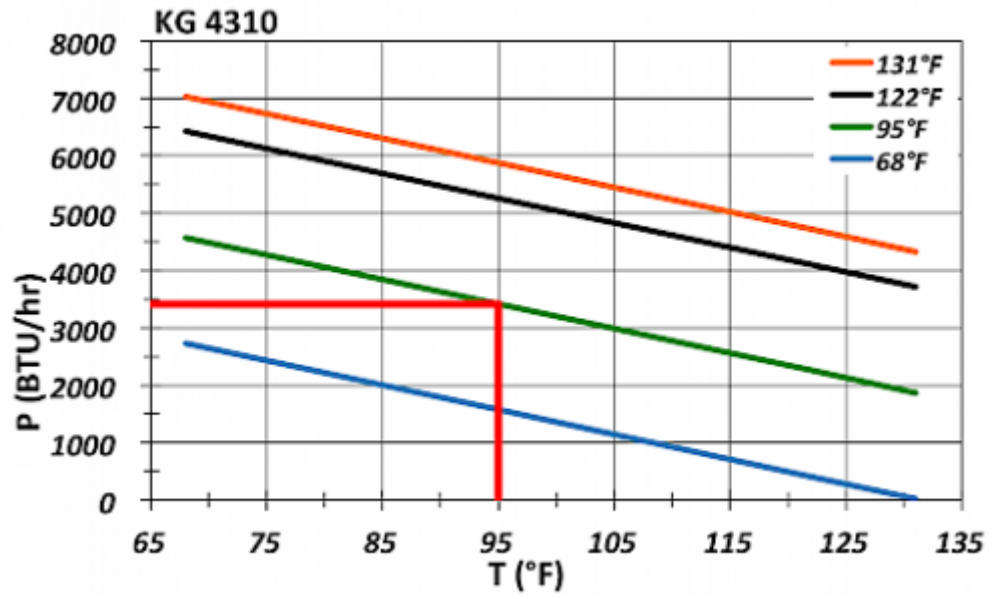


[click image to enlarge](#)

Air flow:

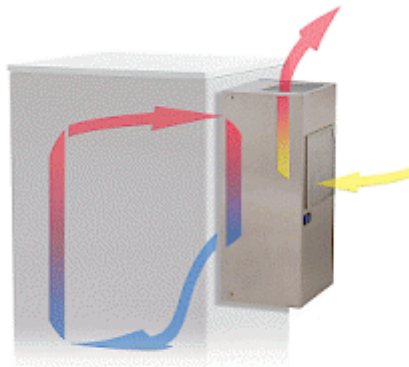

[click image to enlarge](#)

Cut out dimensions:

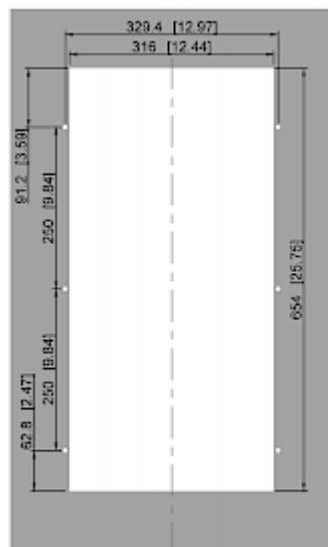

[click image to enlarge](#)