

## Enclosure air conditioner type 4X




### Description

|                            |                                               |
|----------------------------|-----------------------------------------------|
| <b>Order Number:</b>       | 57312182                                      |
| <b>Brand Name:</b>         | Compact Outdoor                               |
| <b>Housing Material:</b>   | Stainless steel AISI 304 (V2A)                |
| <b>Ingress protection:</b> | IP 56 / Type 12, 3, 3R, 4, 4X                 |
| <b>Included:</b>           | Mit Schaltschrankheizung und Aluminium Filter |
| <b>Approvals:</b>          | CE, cURus, cULus                              |
| <b>UL File Number:</b>     | cURus (SA32278), cULus (E498756)              |


## Technical data

|                                              |                                                                          |
|----------------------------------------------|--------------------------------------------------------------------------|
| <b>Cooling capacity 95F/95F:</b>             | 10235 BTU                                                                |
| <b>Cooling capacity 95F/122F:</b>            | 8565 BTU                                                                 |
| <b>Enclosure heater:</b>                     | 1500 W                                                                   |
| <b>Compressor type:</b>                      | Rotary piston compressor                                                 |
| <b>Refrigerant / GWP:</b>                    | R134a / 1430                                                             |
| <b>Refrigerant charge:</b>                   | 820 g / 28.9 oz                                                          |
| <b>High / low pressure:</b>                  | 29 / 6 bar<br>425 / 88 psig                                              |
| <b>Operating temperature range:</b>          | -40°F - 131°F                                                            |
| <b>Air volume flow (system / unimpeded):</b> | Ambient air circuit: 450 / 706 cfm<br>Cabinet air circuit: 560 / 706 cfm |
| <b>Mounting:</b>                             | Wall mounted                                                             |
| <b>Dimension H x W x D:</b>                  | 61 x 18 x 14 inch                                                        |
| <b>Weight:</b>                               | 170 lbs.                                                                 |
| <b>Voltage / Frequency:</b>                  | 380-415 V 50 Hz 3~<br>400-460 V 60 Hz 3~                                 |
| <b>UL Voltage / Frequency:</b>               | 400/460 V ~ 60 Hz 3~                                                     |
| <b>Current 95F95F:</b>                       | 2.1 A @ 50 Hz<br>2.3 A @ 60 Hz                                           |
| <b>Starting current:</b>                     | 7.6 A / 8.1 A                                                            |
| <b>Max. current:</b>                         | 3.3 A / 3.5 A                                                            |
| <b>Nominal power 95F95F:</b>                 | 1.34 kW @ 50 Hz<br>1.70 kW @ 60 Hz                                       |
| <b>Max. power:</b>                           | 1.66 kW @ 50 Hz<br>2.10 kW @ 60 Hz                                       |
| <b>Fuse:</b>                                 | 3 x 6 A (T)                                                              |
| <b>Short-circuit current rating:</b>         | 5 kA                                                                     |
| <b>Connection:</b>                           | Connection terminal block                                                |

### Performance graph:

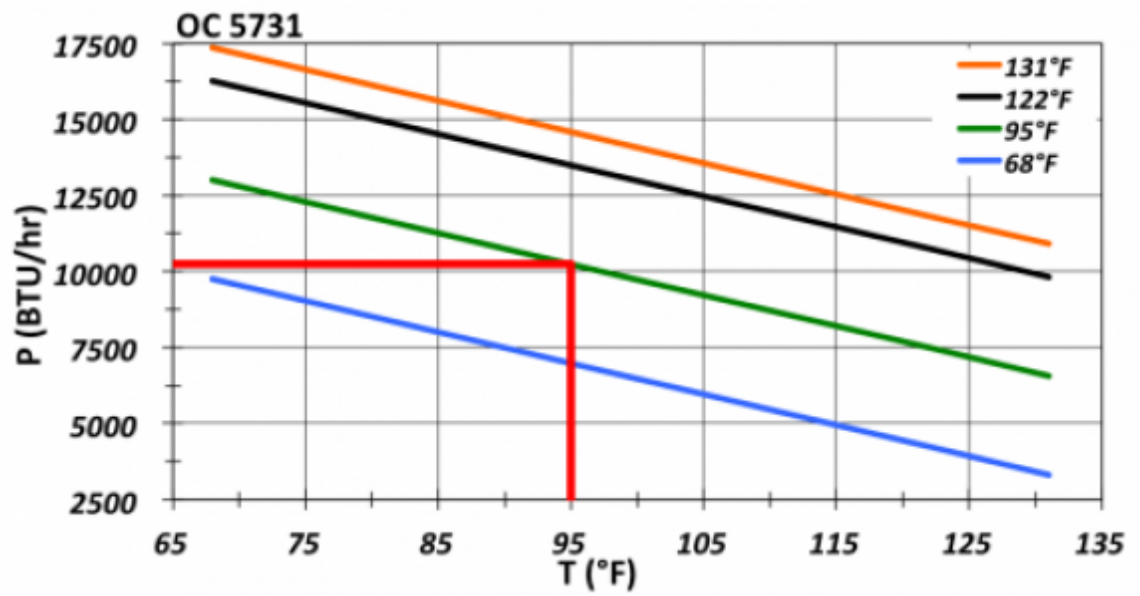

**Cut out dimensions:**

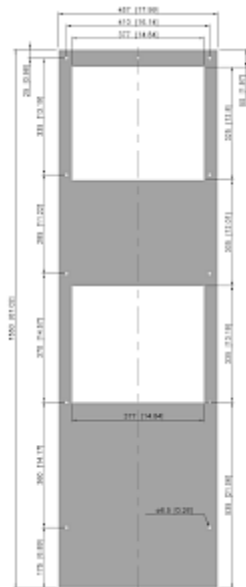

## Order Information

|                                            |                      |
|--------------------------------------------|----------------------|
| <b>With stainless steel AISI 316 (V4A)</b> | 57312184             |
| <b>Verpackungsmaße</b>                     | 1,590 x 503 x 395 mm |
| <b>Bruttogewicht</b>                       | 82 kg                |
| <b>Zolltarifnummer</b>                     | 84158200             |