

Enclosure air conditioner type 4X




Description


Order Number:	57412182
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Included:	Mit Schaltschrankheizung und Aluminium Filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)

Technical data

Cooling capacity 95F/95F:	13,990 BTU
Cooling capacity 95F/122F:	11,600 BTU
Enclosure heater:	2000 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	1 kg / 35.3 oz
High / low pressure:	27.7 / 6 bar 406 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 583 / 883 cfm Cabinet air circuit: 560 / 706 cfm
Mounting:	Wall mounted
Dimension H x W x D:	61 x 18 x 14 inch
Weight:	176 lbs.
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 3~
Current 95F95F:	3.8 A
Starting current:	8.2 A / 8.5 A
Max. current:	5 A
Nominal power 95F95F:	1,91 kW
Max. power:	3,3 kW
Fuse:	3 x 8 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

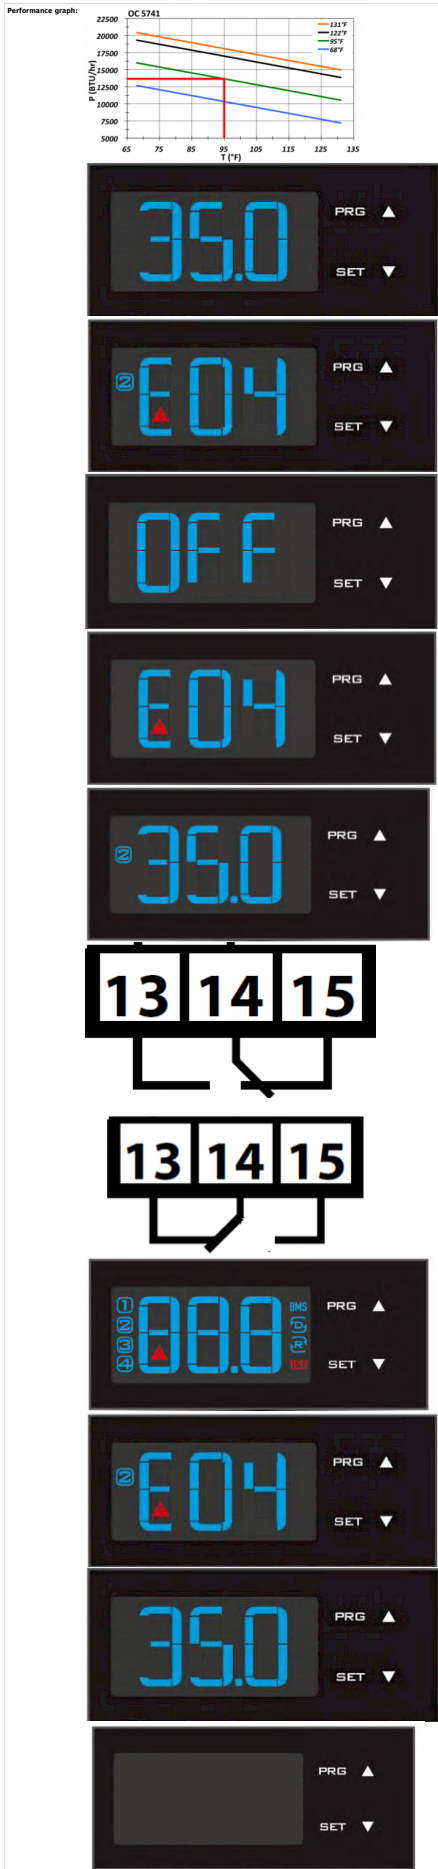

Cut out dimensions:



Order Information

In Edelstahl 316 (V4A) Bestell Nr.	57412184
Verpackungsmaße	1,590 x 503 x 395 mm
Bruttogewicht	87 kg
Zolltarifnummer	84158200