

Air to Water Heat Exchanger RK 2300-120V



Product Features


Brand Name:	SoliTherm
Order Number:	2300110
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	IP 54
Approvals:	CE, RoHS
Taric Code:	84158300

Technical data RK 2300-120V

Cooling capacity 95F/W10 (200 l/h):	1090 BTU
Refrigerant / GWP:	Water, light oils or similar
Temperature range:	34°F ... +149°F
Air volume flow (system / unimpeded):	50 / 141 cfm
Mounting:	External / Internal
Dimension HxWxD:	11.93 x 6.02 x 3.31 in.
Weight:	9.92 lbs.
Voltage / Frequency:	120 V ~ 60 Hz
Starting current:	0.35 A
Max. current:	0.24 A
Max. power:	37 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 inch
Fuse:	4 A (T)
Connection:	Connection Terminals


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Air to Water Heat Exchangers](#)

Performance Graph:

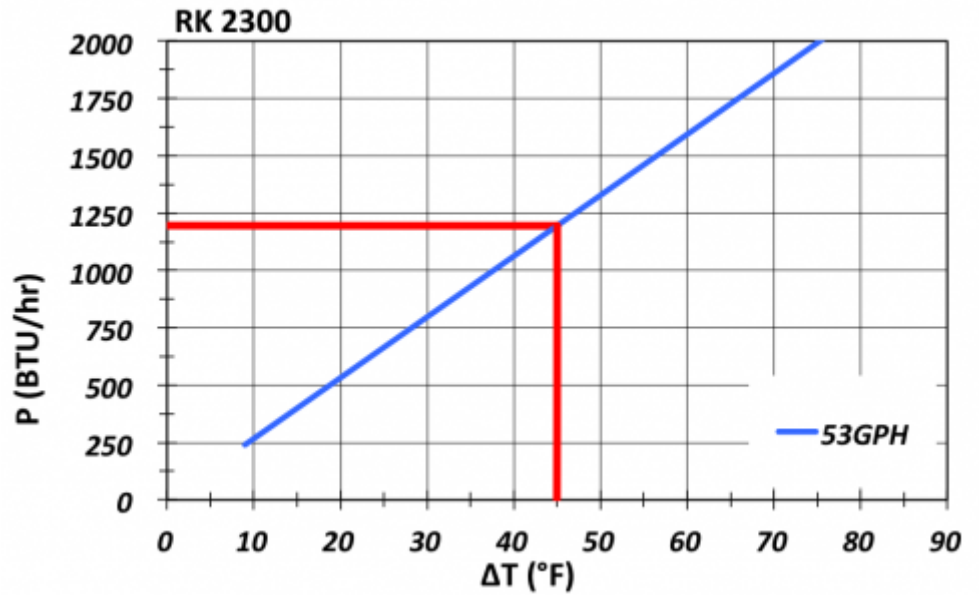


[click image to enlarge](#)

Air flow:

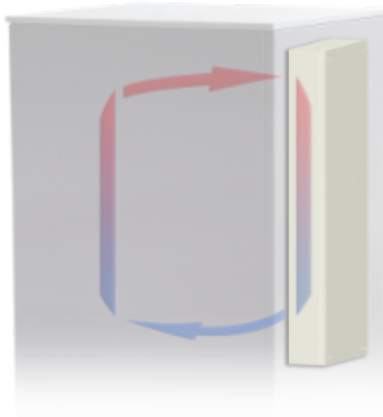

[click image to enlarge](#)

Cut out dimensions:

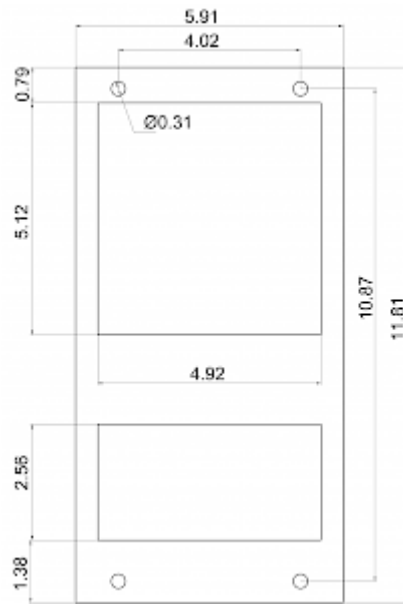

[click image to enlarge](#)