

Enclosure air conditioner type 4X




Description

Order Number:	57040162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical data

Cooling capacity 95F/95F:	1025 BTU
Cooling capacity 95F/122F:	855 BTU @ 50 Hz 855 BTU @ 60 Hz
Enclosure heater:	150 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R 134a / 1430
Refrigerant charge:	115 g / 4.05 oz
High / low pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 50 / 177 cfm Cabinet air circuit: 50 / 80 cfm
Mounting:	Wall mounted
Dimension H x W x D:	18.9 x 9.84 x 7.5 inch
Weight:	34 lbs.
Cut out dimensions:	8 x 9.8 inch
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	1.3 A
Starting current:	5 A
Max. current:	1.5 A
Nominal power 95F95F:	270 W
Max. power:	325 W
Fuse:	2.5 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

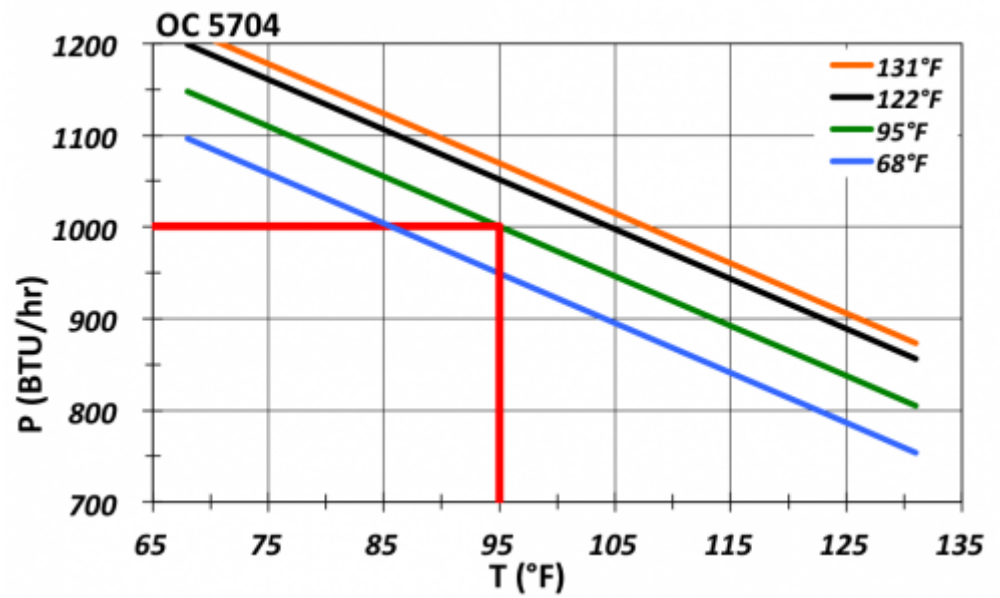

Cut out dimensions:

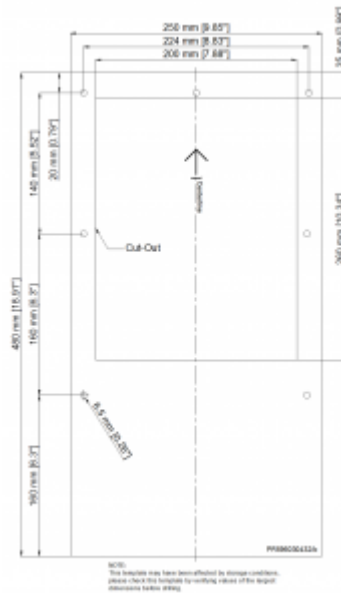

Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57040062
In Edelstahl 316 (V4A) Bestell Nr.	57040064
In Edelstahl 304 (V2A) mit 150 W Schaltschrankheizung Bestell Nr.	57040162
With stainless steel AISI 316 (V4A)	57040164
Verpackungsmaße	530 x 298 x 230 mm
Bruttogewicht	16.5 kg
Zolltarifnummer	84158200