

Enclosure air conditioner type 4X




Description

Order Number:	57311162
Brand Name:	Compact Outdoor
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical data

Cooling capacity 95F/95F:	10235 BTU
Cooling capacity 95F/122F:	8565 BTU
Enclosure heater:	1,500 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	900 g / 31.7 oz
High / low pressure:	29 / 6 bar 425 / 88 psig
Operating temperature range:	-40°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 450 / 706 cfm Cabinet air circuit: 560 / 706 cfm
Mounting:	Wall mounted
Dimension H x W x D:	61 x 18 x 14 inch
Weight:	172 lbs.
Voltage / Frequency:	120 V ~ 50/60 Hz
UL Voltage / Frequency:	115 V ~ 60 Hz
Current 95F95F:	15.3 A
Starting current:	49 A
Max. current:	18.4 A
Nominal power 95F95F:	1,37 kW
Max. power:	1,65 kW
Fuse:	20 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

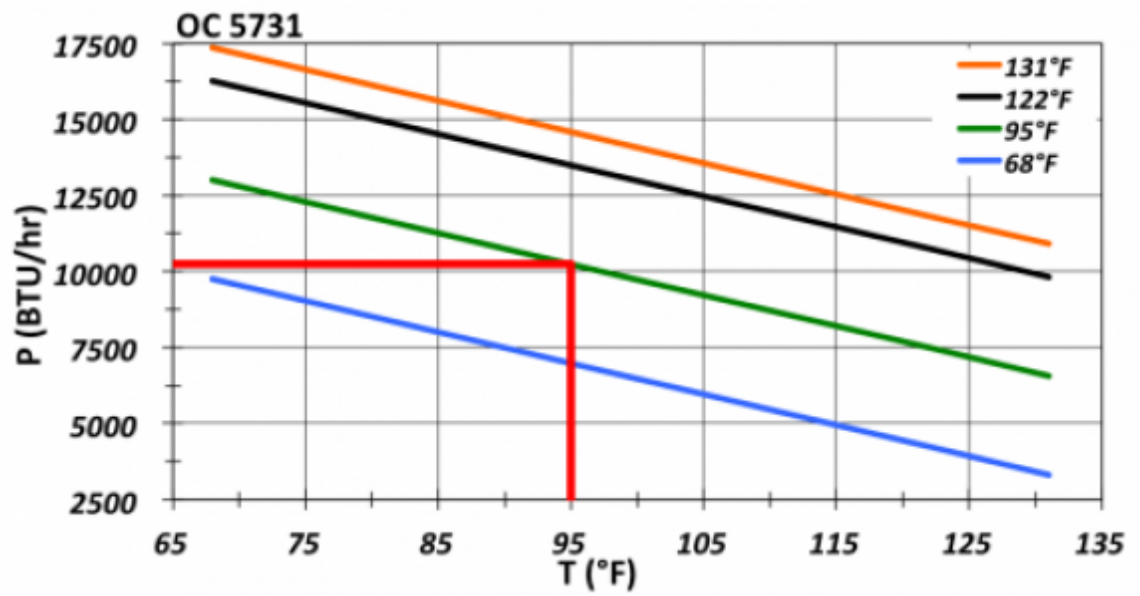

Cut out dimensions:

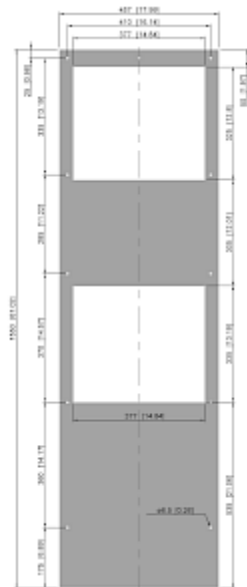

Order Information

In Edelstahl 304 (V2A) Bestell Nr.	57311062
In Edelstahl 316 (V4A) Bestell Nr.	57311064
In Edelstahl 304 (V2A) mit 1500 W Schaltschrankheizung Best. Nr.	57311162
In Edelstahl 316 (V4A) mit 1500 W Schaltschrankheizung Best. Nr.	57311164
Verpackungsmaße	1,590 x 503 x 395 mm
Bruttogewicht	82 kg
Zolltarifnummer	84158200