

Filterlüfter



Description

Order Number:	4883A4000
Brand Name:	SOLIFLEX
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	IP 54, Type 12
Approvals:	CE, cURus, cULus
UL File Number:	E498756


Technical data

Operating temperature range:	14°F - 131°F
Air volume flow unimpeded:	483 cfm - 547 cfm
Dimension H x W x D:	12.8 x 12.8 x 6.3 inch
Cut out dimensions:	11.45 x 11.45 inch (+0.06)
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.55 / 0.74 A
Power consumption:	125 / 166 W
Wall thickness:	0.06 - 0.10 inch
Filter class:	G3 according to EN 779
Installation:	Elastic clips
Noise level:	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz


Air flow:

Q = Air flow [cfm]

P = Static pressure [inH₂O]

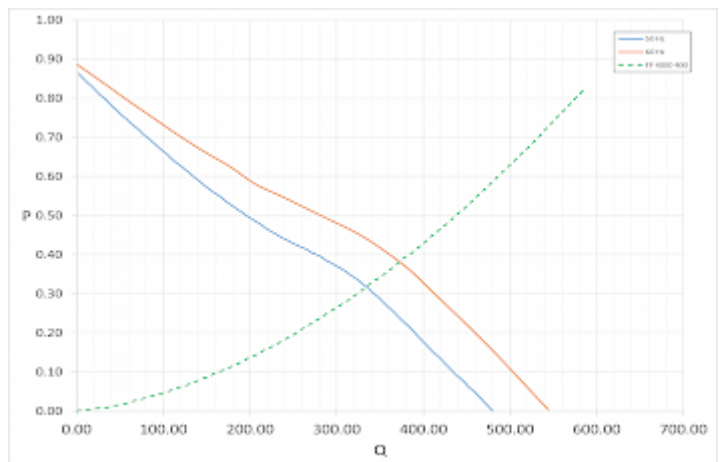

Cut out dimensions:

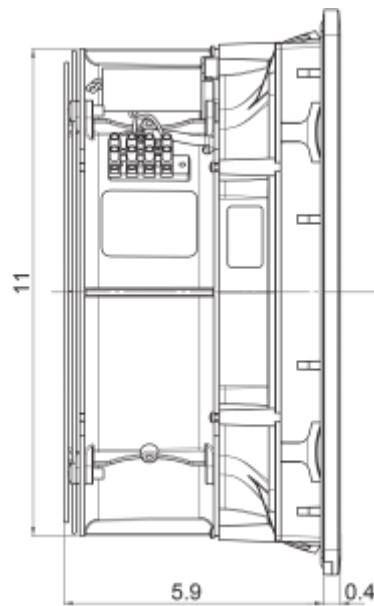

Order Information

In RAL 9005	4883A4003
Mit TYPE 3R Schutzklasse Art.-Nr.	4883A4033
Taric code	84145915
GTIN (EAN)	5350604100794