

FL 4883A 400V



Product Features

Order Number:	4883A9000
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	NEMA 12
Note:	325 x 325 x 158.5 mm
Approvals:	CE, cULus
UL File Nummer:	E498756
Taric Code:	84145915


Technical data FL 4883A 400V

Temperature range:	14°F - 131°F
Dimension H x W x D:	12.8 x 12.8 x 6.3 inch
Weight:	9.37 lbs.
Cut out dimensions:	11.45 x 11.45 inch (+0.06)
Voltage / Frequency:	400/460 V ~ 50/60 Hz
Rated current:	0.20 A / 0.24 A
Power consumption:	110 W / 145 W
Wall thickness:	0.06 - 0.10 inch
Filter class:	G3 according to EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview product group Filter Fans & Exhaust Filters](#)


Air flow:

Q = Air flow [cfm]
P = Static pressure [inH2O]

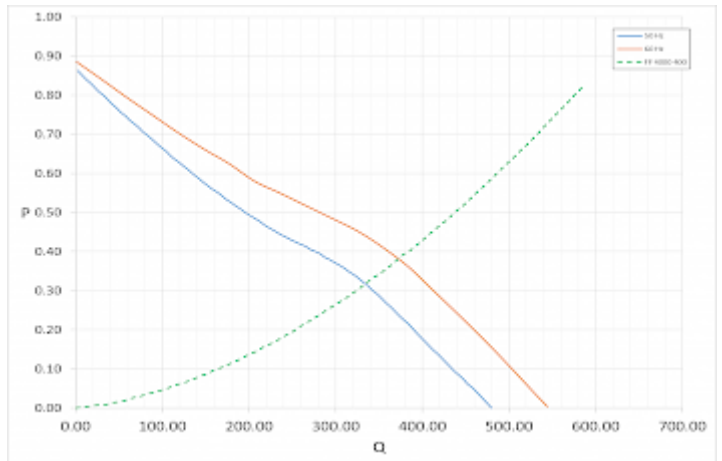

[click image to enlarge](#)

Cut out dimensions:

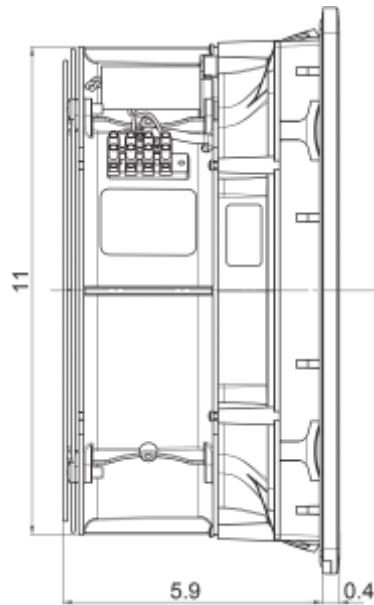

[click image to enlarge](#)