

## Enclosure air conditioner OC 8725, 8500 BTU



### Description

|                            |                           |
|----------------------------|---------------------------|
| <b>Order Number:</b>       | 872500201USL              |
| <b>Brand Name:</b>         | SOLITHERM PROGRESSIVE     |
| <b>Housing Material:</b>   | Mild steel, powder coated |
| <b>Ingress protection:</b> | IP 56 / Type 12, 3, 3R, 4 |
| <b>Included:</b>           | Metal mesh filter         |
| <b>Approvals:</b>          | CE, UL(ACVS), cULus       |
| <b>UL File Number:</b>     | SA32278                   |

## Technical data


|                                              |                                                    |
|----------------------------------------------|----------------------------------------------------|
| <b>Cooling capacity 95F/95F:</b>             | 8530 BTU/hr                                        |
| <b>Cooling capacity 95F/122F:</b>            | 7165 BTU/hr @ 50 Hz<br>7505 BTU/hr @ 60 Hz         |
| <b>EER 95F95F:</b>                           | 6.8 / 5.7                                          |
| <b>Compressor type:</b>                      | Reciprocating compressor                           |
| <b>Refrigerant / GWP:</b>                    | R134a / 1430                                       |
| <b>Refrigerant charge:</b>                   | 360 g / 12.7 oz                                    |
| <b>High / low pressure:</b>                  | 30 / 6 bar<br>435 / 88 psi                         |
| <b>Operating temperature range:</b>          | -40°F - 140°F                                      |
| <b>UL temperature range:</b>                 | -40°F - 140°F                                      |
| <b>Air volume flow (system / unimpeded):</b> | Ambient: 440 / 520 cfm<br>Enclosure: 360 / 520 cfm |
| <b>Mounting:</b>                             | Wall mounted                                       |
| <b>Dimension H x W x D:</b>                  | 35 x 15.6 x 12 inch                                |
| <b>Weight:</b>                               | 104 lbs.                                           |
| <b>Voltage / Frequency:</b>                  | 230 V ~ 50/60 Hz                                   |
| <b>UL Voltage / Frequency:</b>               | 230 V ~ 60 Hz                                      |
| <b>Current 95F95F:</b>                       | 5.35 A @ 50 Hz<br>6.6 A @ 60 Hz                    |
| <b>Starting current:</b>                     | 22.5 A                                             |
| <b>Max. current:</b>                         | 9.4 A                                              |
| <b>Nominal power 95F95F:</b>                 | 1.2 kW @ 50 Hz<br>1.5 kW @ 60 Hz                   |
| <b>Max. power:</b>                           | 2.05 kW                                            |
| <b>Fuse:</b>                                 | 15 A (T)                                           |
| <b>Max circuit ampacity:</b>                 | 15 A                                               |
| <b>Short-circuit current rating:</b>         | 5 kA                                               |
| <b>Rated current compressor:</b>             | 5 A                                                |
| <b>Full load current fans:</b>               | 0.73 A                                             |

**Connection:**

5 pole terminal block for signals  
4 pole terminal block for power  
3 pole terminal block for RS 485 MODBUS

---

### Performance graph:

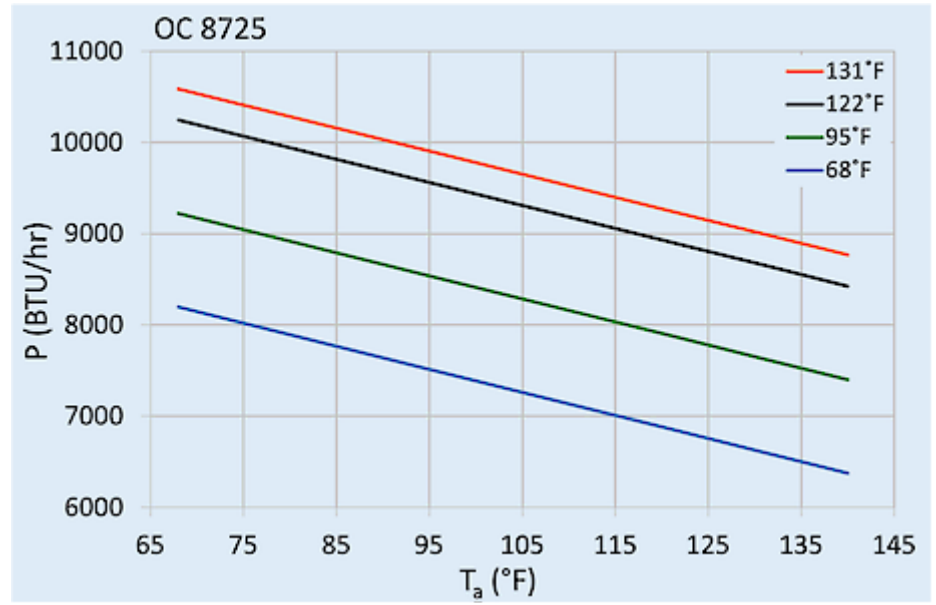

### Cut out dimensions:

