

Outdoor air conditioner




Description

Order Number:	4105000
Brand Name:	SoliTherm Outdoor
Housing Material:	Aluminum
Ingress protection:	NEMA 3R
Approvals:	CE

Technical data

Cooling capacity 95F/95F:	2290 BTU
Cooling capacity 95F/122F:	1430 BTU
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	350 g / 12.3 oz
High / low pressure:	20 / 6 bar 200 / 88 psig
Operating temperature range:	50°F - 122°F
Air volume flow (system / unimpeded):	Ambient air circuit: 210 / 383 cfm Cabinet air circuit: 123 / 265 cfm
Mounting:	Internal
Dimension H x W x D:	24.72 x 18.43 x 6.26 in.
Weight:	42.99 lbs
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	2.1 A @ 50 Hz 2.2 A @ 60 Hz
Starting current:	6.5 A
Max. current:	3 A
Nominal power 95F95F:	450 W @ 50 Hz 500 W @ 60 Hz
Max. power:	680 W
Fuse:	6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Performance graph:

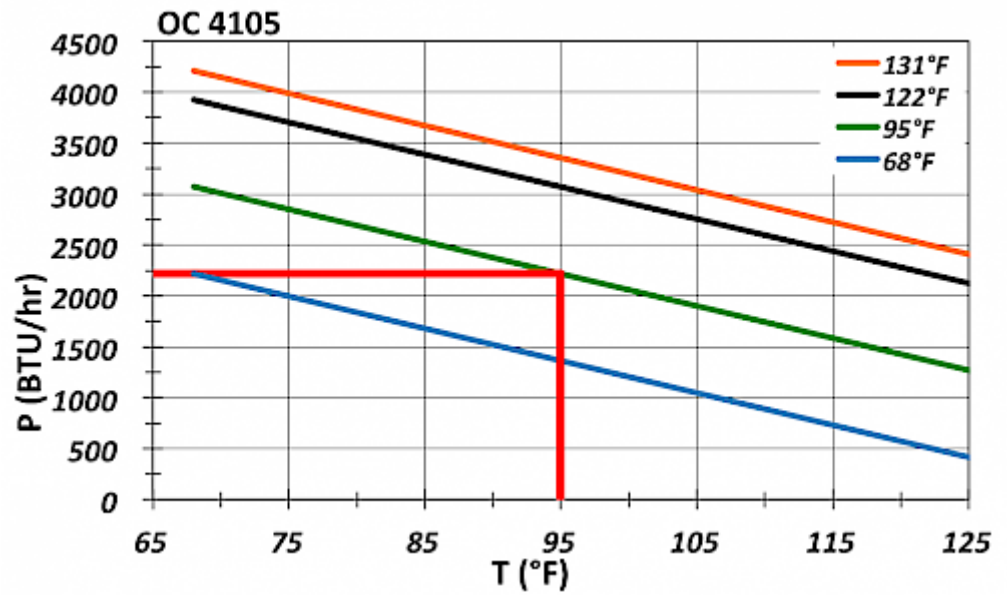

Cut out dimensions:

